
shower channel CeraLine F Duo 1600 mm, DN 50

Part number: 524041
GTIN: 4001636524041
Rebate group: 8



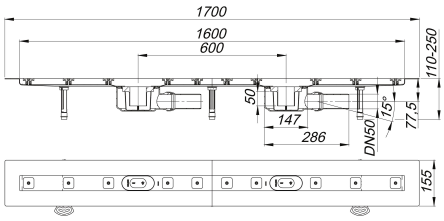

Description:

shower channel CeraLine F Duo 1600 mm, DN 50
conforming to DIN EN 1253
Linear drainage, with two drain bodies, outlet horizontal, ball-joint adjustable 0¬–¬15¬degrees,
DN 50, BS 2" sw socket or HDPE 56 mm

specification
– sound-insulated, height adjustable levelling legs
– integral sand coated flange for secure bonding of under-tile waterproofing
– removeable trap insert, 50 mm water seal (conforming to DIN EN 1253)
– height adjustable pedestals for levelling the cover-plate
– temporary blanking plate
– tiling gauges
– tile-trim jig

material
channel 304 stainless steel, trap polypropylene

Options for CeraLine F Duo:

Any made-to-measure length up to 2000 mm can be supplied. Please enquire!

The outlet connector can be supplied in ABS to suit British Standard sizes and PE-HD conforming to DIN EN 1519. Please enquire.

Flow rates tested to DIN EN 1253:

Nominal diameter	Product standard	Min. flow rate according to norm	Water level according to norm	Drainage capacity
DN 50	DIN EN 1253	0.80 l/s	20.00 mm	1.40 l/s

Spare parts:

523983 adjustable pedestals