

anti-flooding valve Stausafe F, DN 125

Part number: 661586
GTIN: 4001636661586
Rebate group: 3

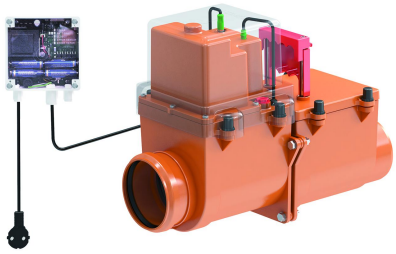

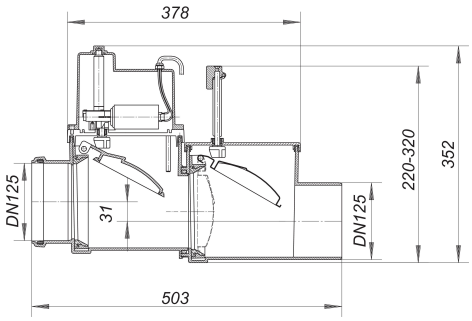

Description:

anti-flooding valve Stausafe F, DN 125
according to EN 13564 type 3 (F)
operation conforms to DIN 1986-100:2002-03 for use with faecal waste water

SPECIFICATION
– electronic flood sensor
– flap with electrically operated lock
– secondary stainless steel flap with manual lock
– stainless steel pivots
– sealed compartment for motor
– emergency power by batteries
– test-port
– easy-to-install ABS housing
– inspection cover with wingnuts can be opened for maintenance without tools
– electronic controls in box for on-wall mounting with warning lamp/ buzzer can be used with central building control systems.

flaps: 316Ti stainless steel/HDPE
power supply: 230 V/0,5 A
connection cable: 6 m, PUR, 5 x 0.75 mm² *
motor supply: 12 V low voltage
emergency power: batteries, max. 6 days
sensor: coaxial electrode
sealing force: 500 newtons
closing time: approx 9 seconds

The motorized flap and its related components can be supplied separately, to convert a type RS valve to type F specification, parts 664402/ 664426.

Spare parts:

664037	cover seal for Stausafe DN 100/DN 125	664204
664402	anti-flooding conversion kit Stausafe R	