IMO Wall-mounted basin spout without pop-up waste - Chrome

IMO

13 800 671 Product version from 4/1/2024



- 170mm projection
- fixed spout
- rectangular, air-enriched flow
- hole diameter 40 mm
- rosette 80 x 60 mm
- 1/2" connection
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

For Touchfree control please order eSet Touchfree with temperature adjustment

Chrome	13 800 671-00
Brushed Platinum	13 800 671-06 0010
Brushed Platinum	13 800 671-06
Brushed Light Gold	13 800 671-27
Brushed Chrome	13 800 671-93

Recommended miscellaneous




Concealed wall elbow - 35 085 970 90
- min. recess depth 90 mm
- max. recess depth 163 mm


IMO Wall-mounted basin spout without pop-up waste - Chrome

13 800 671 Product version from 4/1/2024

mm [inches]

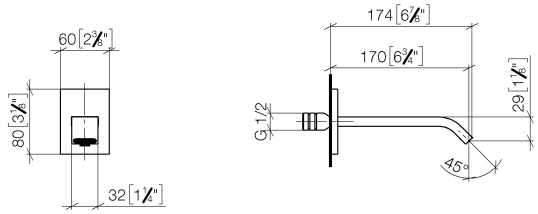

Flow rate chart

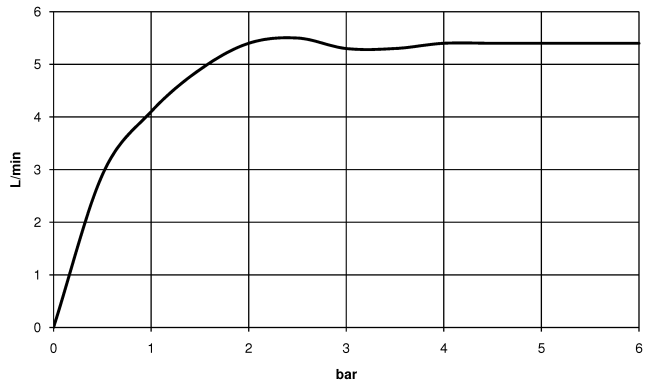

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations

Ü-Zeichen

IMO Wall-mounted basin spout without pop-up waste - Chrome


13 800 671 Product version from 4/1/2024

Certificates and sustainability

LGA_38	WRAS_250102

IMO Wall-mounted basin spout without pop-up waste - Chrome

13 800 671 Product version from 4/1/2024

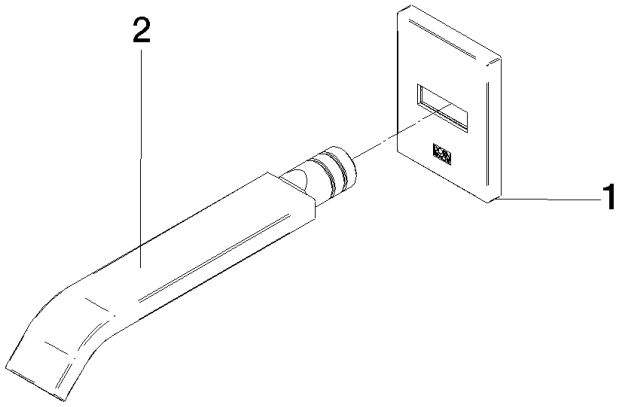

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 27 67 023 00-00	rosette	1.00	10
2	90 28 22 413 00-00	spout	1.00	10

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com