IMO Bath spout for wall mounting - Chrome

IMO

13 801 670 Product version from 4/1/2024



- 200mm projection
- rectangular normal flow
- hole diameter 37 mm
- 1/2" connection
- max. flow 25.1 l/min at 3 bar flow pressure
- WRAS

Chrome	13 801 670-00
Brushed Platinum	13 801 670-06
Dark Chrome	13 801 670-19
Brushed Light Gold (PVD)	13 801 670-27
Matte Black	13 801 670-33
Brushed Gold (PVD)	13 801 670-37
Brushed Chrome	13 801 670-93
Brushed Dark Platinum	13 801 670-99

Recommended miscellaneous




Concealed wall elbow - 35 085 970 90
- max. recess depth 163 mm
- min. recess depth 90 mm

IMO Bath spout for wall mounting - Chrome


IMO

13 801 670 Product version from 4/1/2024

mm [inches]

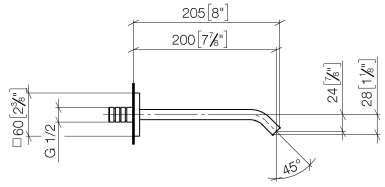

Flow rate chart

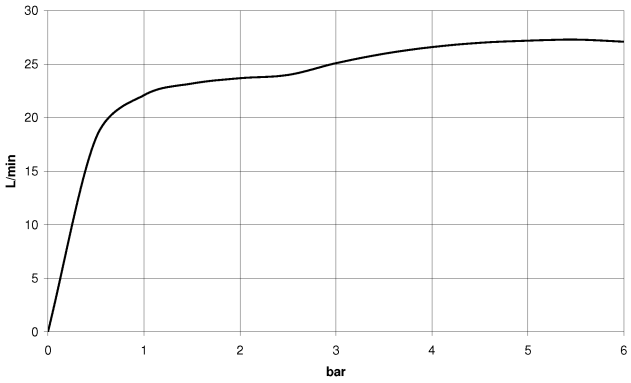

Codes & Standards

ASME A112.18.1	cUPC	Scottish Water Byelaws	UK Water Supply Regulations

IMO Bath spout for wall mounting - Chrome


13 801 670 Product version from 4/1/2024

Certificates and sustainability

IAPMO_4976 WRAS_2005

IMO Bath spout for wall mounting - Chrome

13 801 670 Product version from 4/1/2024

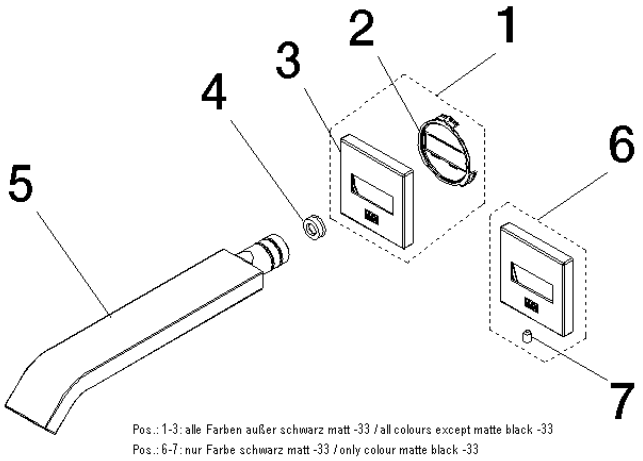

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 27 67 008 00-00	rosette	1.00	26
7	09 31 11 058 90	pin	1.00	14
6	90 27 97 050 00-33	rosette	1.00	54
2	09 18 40 139 90	base	1.00	14
4	09 23 01 057 90	flow reducer	1.00	14
5	04 28 22 241 00-00	spout	1.00	26
3	09 27 67 008-00	rosette	1.00	26

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com