
Rain shower for recessed ceiling installation 300 mm - Chrome

SERIES SPECIFIC

28 033 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical data:

- min. recess depth 137 mm

Planning tips:

- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.

Notes:

Chrome	28 033 970-00
Brushed Platinum	28 033 970-06
Platinum	28 033 970-08
Dark Chrome	28 033 970-19
Light Gold	28 033 970-26
Brushed Light Gold	28 033 970-27
Brushed Durabrass (23kt Gold)	28 033 970-28
Matte Black	28 033 970-33
Brushed Dark Brass	28 033 970-39
Brushed Bronze	28 033 970-42
Brushed Champagne (22kt Gold)	28 033 970-46
Champagne (22kt Gold)	28 033 970-47
Brushed Chrome	28 033 970-93
Brushed Dark Platinum	28 033 970-99

Required miscellaneous



Concealed ceiling installation box for recessed ceiling installation - 35 033 970 90
- recess depth 137mm
- 2x female thread 1/2" outlet
- concealed rough parts
- flush-mounted installation box Ø 360 mm RAL 9003 signal white


DORN BRACHT

Rain shower for recessed ceiling installation 300 mm - Chrome


SERIES SPECIFIC

28 033 970 Product version from 5/1/2022

mm [inches]

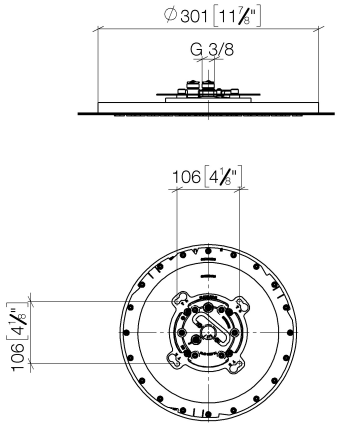

Flow rate chart

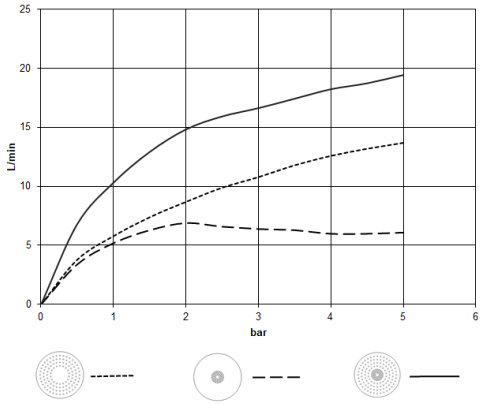

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations

Ü-Zeichen

Rain shower for recessed ceiling installation 300 mm - Chrome

SERIES SPECIFIC

28 033 970 Product version from 5/1/2022

Certificates and sustainability


LGA_38 WRAS_240502

DORN BRACHT

Rain shower for recessed ceiling installation 300 mm - Chrome

SERIES SPECIFIC

28 033 970 Product version from 5/1/2022

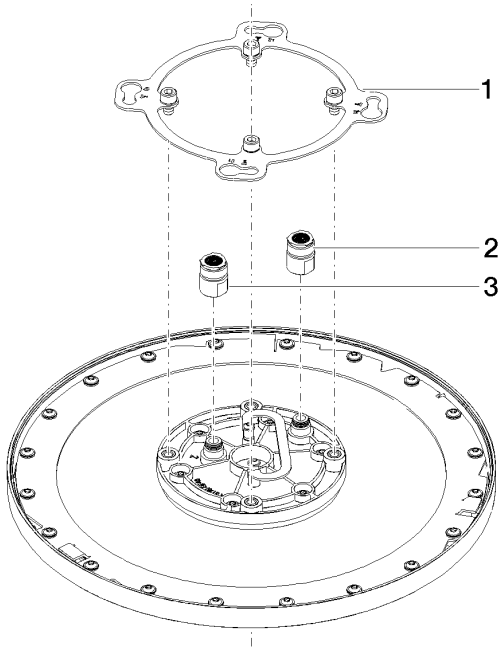

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 262 00 90	flange	1.00	2
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2