Rain shower for surface-mounted ceiling installation 300 x 240 mm - Chrome

SERIES SPECIFIC

28 041 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- Rain panel with 2 different spray modes
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical data:

- Distance to ceiling from bottom edge of shower 40 mm

Planning tips:

- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.

Notes:

Chrome	28 041 980-00
Brushed Platinum	28 041 980-06
Platinum	28 041 980-08
Brushed Durabrass (23kt Gold)	28 041 980-28
Matte Black	28 041 980-33
Brushed Dark Brass	28 041 980-39
Brushed Champagne (22kt Gold)	28 041 980-46
Champagne (22kt Gold)	28 041 980-47
Brushed Chrome	28 041 980-93
Brushed Dark Platinum	28 041 980-99

Required miscellaneous



Concealed ceiling installation box with ceiling fixing - 35 041 970 90

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" outlet
- concealed rough parts


DORN BRACHT


Rain shower for surface-mounted ceiling installation 300 x 240 mm - Chrome

SERIES SPECIFIC


28 041 980 Product version from 5/1/2022

mm [inches]

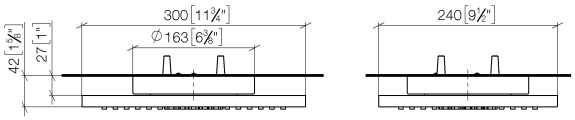



Flow rate chart

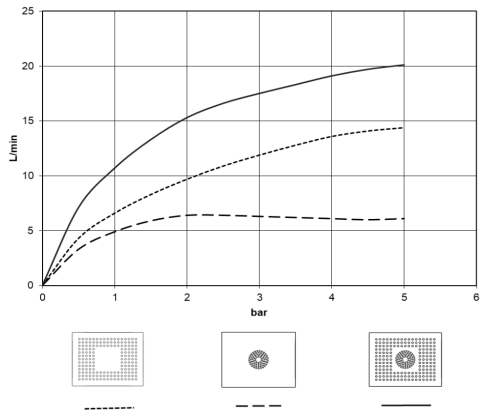

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations

Ü-Zeichen

DORN BRACHT

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Chrome

SERIES SPECIFIC

28 041 980 Product version from 5/1/2022

Certificates and sustainability


LGA_38	WRAS_240502

DORN BRACHT

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Chrome

SERIES SPECIFIC

28 041 980 Product version from 5/1/2022

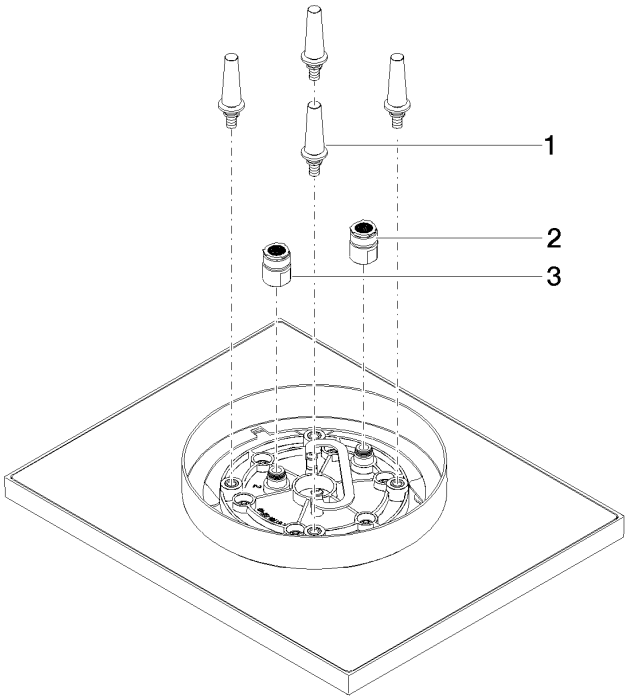

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1.00	2
3	90 24 03 309 00 90	connection	1.00	2
2	90 24 03 309 01 90	connection	1.00	2