MADISON Rainshower with ceiling fixing 200 mm - Chrome

MADISON

28 565 977 Product version up to 12/5/2019



- rain shower Ø 200 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- Function from: 8 l/min
- with anti-scale system

Technical data:

- distance between ceiling and lower edge of the shower 185mm
- rosette Ø 55 mm
- 1/2" connection

Notes:

Chrome	28 565 977-00
Brushed Platinum	28 565 977-06
Platinum	28 565 977-08
Durabrass (23kt Gold)	28 565 977-09
Brushed Durabrass (23kt Gold)	28 565 977-28
Brushed Dark Brass (PVD)	28 565 977-39
Brushed Bronze (PVD)	28 565 977-42
Brushed Dark Platinum	28 565 977-99

Recommended miscellaneous




Concealed wall elbow - 35 085 970 90
- max. recess depth 163 mm
- min. recess depth 90 mm


MADISON Rainshower with ceiling fixing 200 mm - Chrome

28 565 977 Product version up to 12/5/2019

mm [inches]



Flow rate chart

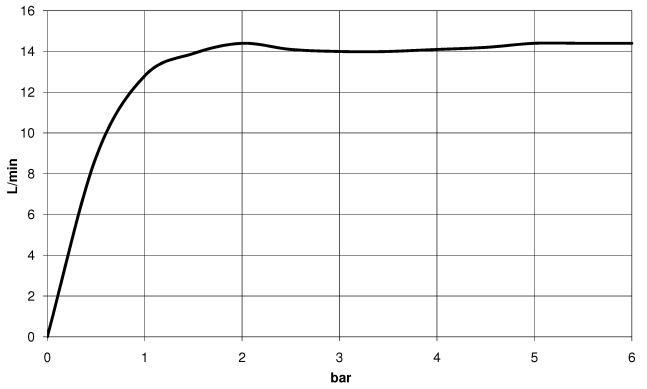

Codes & Standards

DIN 4109	EN 1112	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		

MADISON Rainshower with ceiling fixing 200 mm - Chrome


28 565 977 Product version up to 12/5/2019

Certificates and sustainability

DVGW_DW-6517DN0	LGA_38	WRAS_250102

MADISON Rainshower with ceiling fixing 200 mm - Chrome

28 565 977 Product version up to 12/5/2019

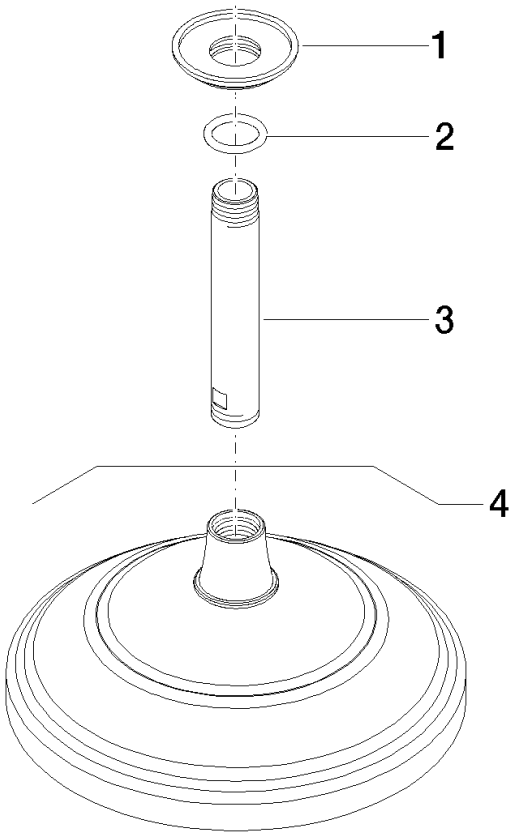

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 35 003-00	rosette	1.00	26
3	09 11 03 018-00	connection	1.00	26
2	90 14 10 026 00 90	seal	2.00	14

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com