LULU Rain shower with ceiling fixing FlowReduce 300 x 240 mm - Chrome

LULU

28 766 710



- rain shower 300 x 240mm
- rain flow
- max. flow 12 l/min
- Function from: 12 l/min
- distance between ceiling and lower edge of the shower 165mm
- rosette 78 x 55, as required
- 1/2" connection
- with anti-scale system
- quick clearing
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


Chrome	28 766 710-00
Brushed Platinum	28 766 710-06

LULU Rain shower with ceiling fixing FlowReduce 300 x 240 mm - Chrome


LULU

28 766 710

mm [inches]

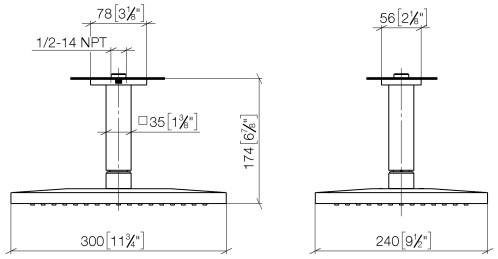

Flow rate chart

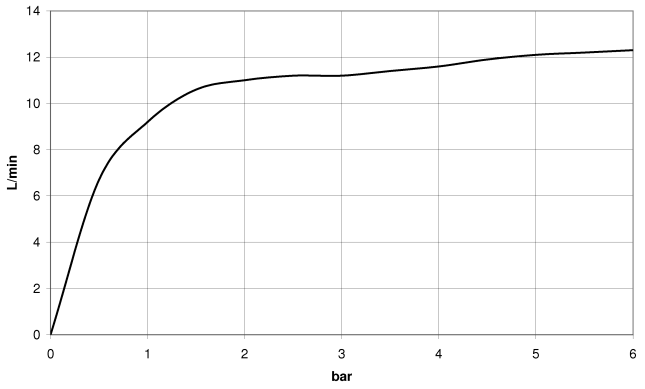

Codes & Standards

DIN 4109	ISO 3822	Ü-Zeichen

LULU Rain shower with ceiling fixing FlowReduce 300 x 240 mm - Chrome


28 766 710

Certificates and sustainability

LGA_38

LULU Rain shower with ceiling fixing FlowReduce 300 x 240 mm - Chrome

28 766 710

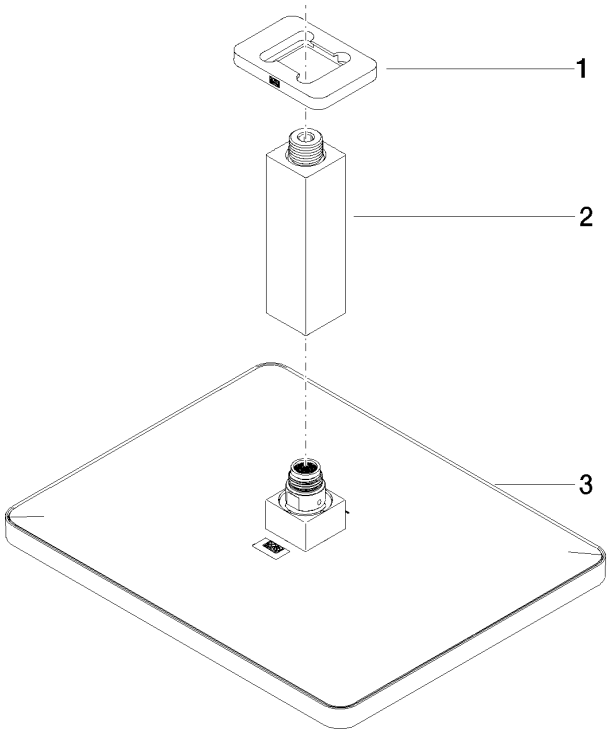

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 71 020-00	rosette	1.00	10
3	90 12 05 062 20-00	shower	1.00	10
2	90 11 10 092 00-00	connection	1.00	10

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com