TARA Two-way diverter for bath rim or tile edge installation - Chrome

TARA

29 140 892 Product version from 6/30/2015




- automatic bath/shower diverter
- hole diameter 32 mm
- rosette Ø 55 mm
- 1/2" connection
- max. flow 64.9 l/min at 3 bar flow pressure
- WRAS

Chrome	29 140 892-00
Brushed Platinum	29 140 892-06
Platinum	29 140 892-08
Dark Chrome	29 140 892-19
Brushed Durabrass (23kt Gold)	29 140 892-28
Matte Black	29 140 892-33
Brushed Dark Brass	29 140 892-39
Brushed Bronze	29 140 892-42
Brushed Champagne (22kt Gold)	29 140 892-46
Champagne (22kt Gold)	29 140 892-47
Brushed Chrome	29 140 892-93
Brushed Dark Platinum	29 140 892-99

TARA Two-way diverter for bath rim or tile edge installation - Chrome

29 140 892 Product version from 6/30/2015

mm [inches]

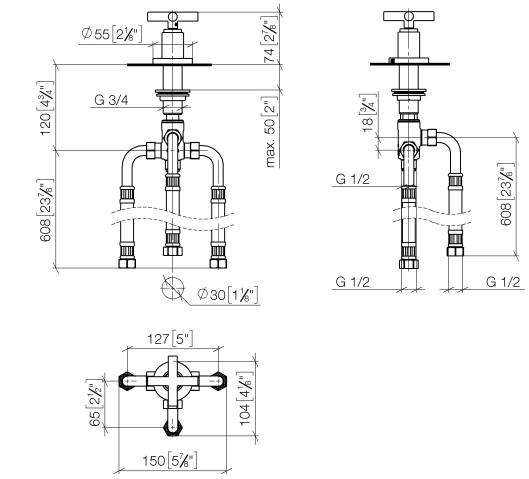

Flow rate chart



Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen	

29 140 892 Product version from 6/30/2015


Certificates and sustainability

WRAS_1911 LGA_29 IAPMO_4976

TARA Two-way diverter for bath rim or tile edge installation - Chrome

29 140 892 Product version from 6/30/2015

Parts for other finishes can be found here: Brushed Platinum

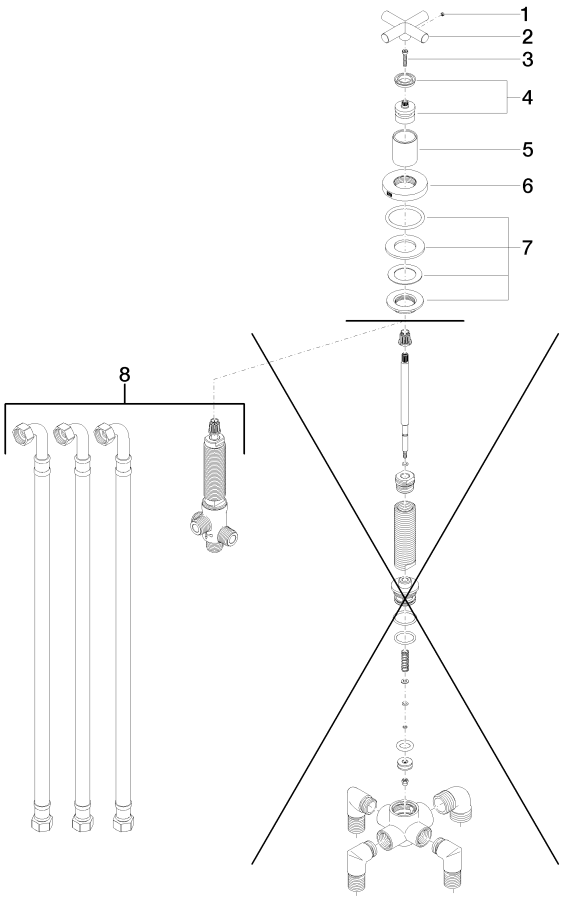

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	09 21 02 140-00	sleeve	1.00	10
1	09 31 11 055 90	pin	1.00	2
8	90 17 09 051 00 90	diverter	1.00	2
4	90 12 12 007 00-00	base	1.00	10
7	04 23 10 004 03 90	fixing set	1.00	2
2	09 20 89 011-00	handle	1.00	10
6	09 27 89 102-00	rosette	1.00	10
3	90 30 30 075 00 90	screw	1.00	2

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com