TARA Wall-mounted valve cold water without pop-up waste - Chrome

TARA

30 010 892 Product version from 6/30/2009



- 140mm projection
- fixed spout
- circular, air-enriched flow
- adapter with male thread 3/4"
- hole diameter 32 mm
- rosette Ø 55 mm
- max. flow 5.7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Chrome	30 010 892-00
Brushed Platinum	30 010 892-06
Platinum	30 010 892-08
Dark Chrome	30 010 892-19
Brushed Durabrass (23kt Gold)	30 010 892-28
Matte Black	30 010 892-33
Brushed Dark Brass	30 010 892-39
Brushed Bronze	30 010 892-42
Brushed Champagne (22kt Gold)	30 010 892-46
Champagne (22kt Gold)	30 010 892-47
Brushed Chrome	30 010 892-93
Brushed Dark Platinum	30 010 892-99

Recommended miscellaneous




Concealed wall elbow - 35 085 970 90
- min. recess depth 90 mm
- max. recess depth 163 mm


TARA Wall-mounted valve cold water without pop-up waste - Chrome

30 010 892 Product version from 6/30/2009

mm [inches]



Flow rate chart

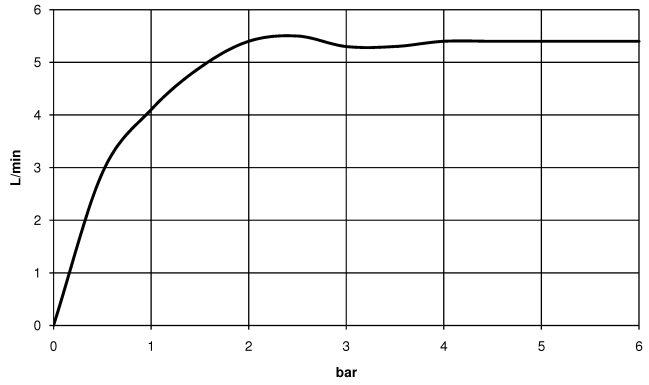

Codes & Standards

DIN 4109	ISO 3822	Ü-Zeichen

30 010 892 Product version from 6/30/2009

Certificates and sustainability

LGA_18

TARA Wall-mounted valve cold water without pop-up waste - Chrome

30 010 892 Product version from 6/30/2009

