DORN BRACHT

TARA Wall-mounted valve cold water without pop-up waste - Brushed Chrome

30 010 892



- 140mm projection
- fixed spout
- circular, air-enriched flow
- adapter with male thread 3/4"
- hole diameter 32 mm
- rosette Ø 55 mm
- max. flow 5.7 l/min
- lead-free
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Brushed Chrome	30 010 892-93
Chrome	30 010 892-00
Brushed Platinum	30 010 892-06
Platinum	30 010 892-08
Dark Chrome	30 010 892-19
Brushed Durabrass (23kt Gold)	30 010 892-28
Matte Black	30 010 892-33
Brushed Champagne (22kt Gold)	30 010 892-46
Champagne (22kt Gold)	30 010 892-47
Brushed Dark Platinum	30 010 892-99

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com


DORN BRACHT

TARA Wall-mounted valve cold water without pop-up waste - Brushed Chrome


TARA

30 010 892

mm [inches]



Flow rate chart

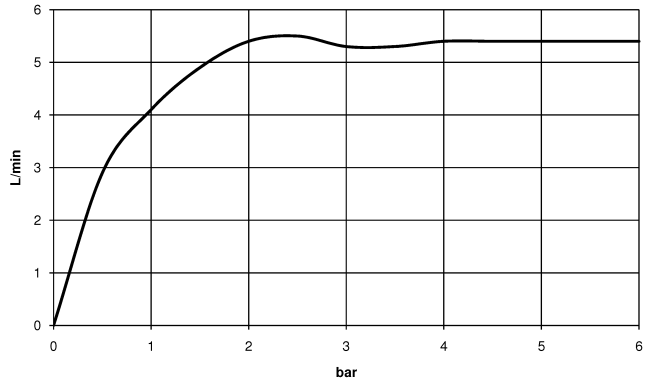

Certificates

LGA_18902.

DORN BRACHT

TARA Wall-mounted valve cold water without pop-up waste - Brushed Chrome

30 010 892

