Concealed thermostat with two function volume control - Brushed Champagne (22kt Gold)

META

36 426 970



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS 1906098

Brushed Champagne (22kt Gold)	36 426 970-46
Chrome	36 426 970-00
Brushed Platinum	36 426 970-06
Platinum	36 426 970-08
Dark Chrome	36 426 970-19
Brushed Durabrass (23kt Gold)	36 426 970-28
Matte Black	36 426 970-33
Champagne (22kt Gold)	36 426 970-47
Brushed Chrome	36 426 970-93
Brushed Dark Platinum	36 426 970-99

Required miscellaneous



Concealed thermostat with built-in isolators - 35 426 970 90
- max. recess depth 136 mm
- min. recess depth 80 mm

Required miscellaneous



Concealed thermostat - 35 425 970 90
- max. recess depth 136 mm
- min. recess depth 80 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90


DORN BRACHT

Concealed thermostat with two function volume control - Brushed Champagne (22kt Gold)


META

36 426 970
mm [inches]





Flow rate chart

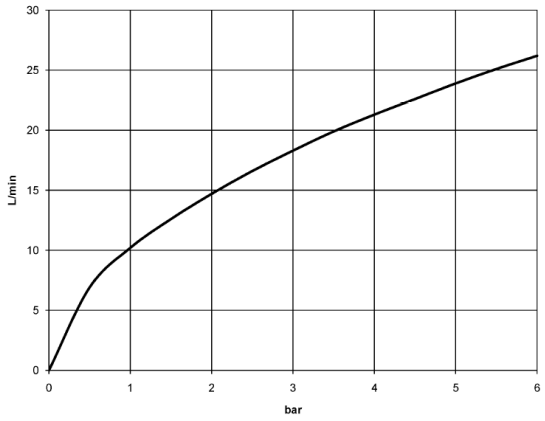

Certificates

LGA_19385.

DVGW_DW-6512DN0119.

LGA_19384.

WRAS_1906098.

DORN BRACHT

Concealed thermostat with two function volume control - Brushed Champagne (22kt Gold)

META

36 426 970

