Concealed thermostat with three function volume control - Brushed Champagne (22kt Gold)

IMO

36 427 670



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS 1906098

Fits: IMO, MEM, CL.1, CYO

Brushed Champagne (22kt Gold)	36 427 670-46
Chrome	36 427 670-00
Brushed Platinum	36 427 670-06
Platinum	36 427 670-08
Dark Chrome	36 427 670-19
Brushed Durabrass (23kt Gold)	36 427 670-28
Matte Black	36 427 670-33
Champagne (22kt Gold)	36 427 670-47
Brushed Chrome	36 427 670-93
Brushed Dark Platinum	36 427 670-99

Required miscellaneous



Concealed thermostat - 35 427 970 90
●max. recess depth 136 mm
●min. recess depth 80 mm

Required miscellaneous



Concealed thermostat with built-in isolators - 35 428 970 90
●max. recess depth 136 mm
●min. recess depth 80 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90


Concealed thermostat with three function volume control - Brushed Champagne (22kt Gold)

IMO

36 427 670
mm [inches]

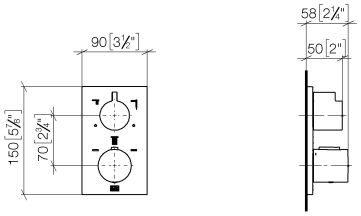

Flow rate chart

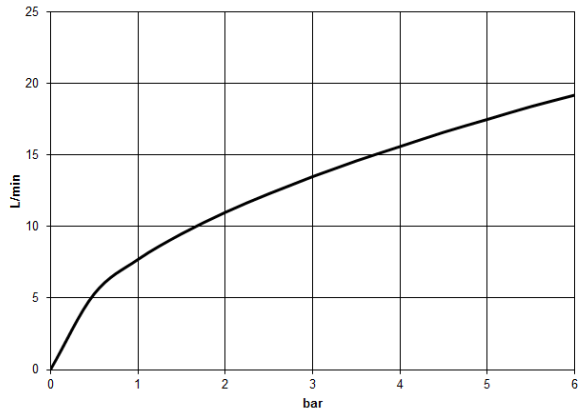

Certificates

LGA_29330.

DVGW_DW-6512DN0119.

WRAS_1906098.

DORN BRACHT

Concealed thermostat with three function volume control - Brushed Champagne (22kt Gold)

IMO

36 427 670

