# SERIES-VARIOUS AQUAHALO Rain panel - Chrome

SERIES-VARIOUS

41 750 979 Product version from 4/1/2024



- exposed trim parts
- Rain panel with 3 different flow modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 14 l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 9 l/min (at 3 bar)
- DIAMOND RAIN: Ring of rain, max. flow rate 6.8 l/min (at 3 bar)

**Technical data:**

- Outer diameter: 605 mm, opening diameter: 465 mm
- Weight: 6 kg

**Electric:**

Separate LED power supply

- 350mA (CC)

Input LED power supply

- 350mA (CC)
- Input 100-240V AC 50-60Hz
- Technology: LED, not dimmable

Spot lighting

Output LED power supply

Output specification LED power supply

- IP67
- SELV (Safety Extra Low Voltage)
- Class 2

**Ceiling module power supply**

- Supply pipe 7 m
- LED colour temperature approx. 3000 K
- Bulbs protected against splashing water
- Provided by customer: Light switch

**Planning tips:**

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).

**Notes:**

- Recommended control element: xTool
- Contains energy efficiency class bulbs

| | |
|---|---|
| Chrome | 41 750 979-00 |
| Brushed Platinum | 41 750 979-06 |
| Matte Black | 41 750 979-33 |
| Brushed Champagne (22kt Gold) | 41 750 979-46 |
| Champagne (22kt Gold) | 41 750 979-47 |

# SERIES-VARIOUS AQUAHALO Rain panel - Chrome

41 750 979 Product version from 4/1/2024

## Required miscellaneous




**SERIES-VARIOUS AQUAHALO Concealed ceiling installation box - Chrome** 35 750 970-00

●concealed rough parts
●Ceiling installation enclosure 605 x 605 x 95 mm
●Weight: 10 kg
●min. recess depth 110 mm
●max. recess depth 150 mm
●Pre-assembly kit for three-way diverter included


# SERIES-VARIOUS AQUAHALO Rain panel - Chrome



41 750 979 Product version from 4/1/2024

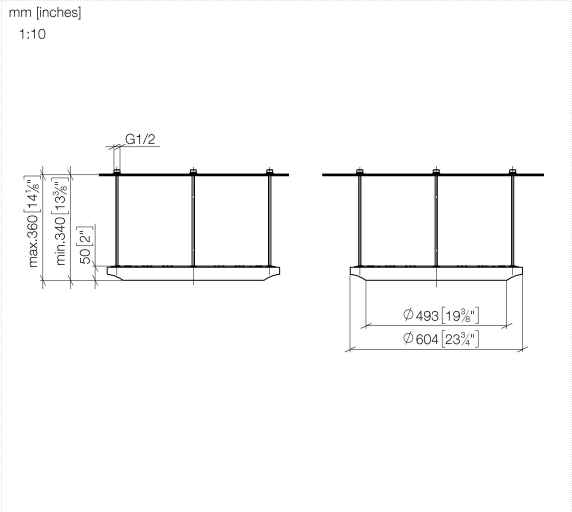


## Flow rate chart

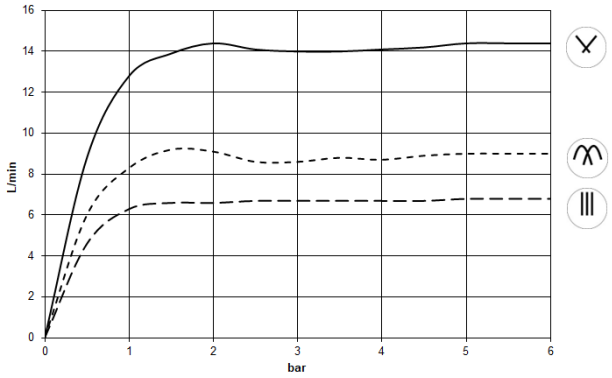


## Codes & Standards

| | | | |
|---|---|---|---|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |


Ü-Zeichen

## Certificates and sustainability

LGA_38 WRAS_250302

# SERIES-VARIOUS AQUAHALO Rain panel - Chrome

41 750 979 Product version from 4/1/2024

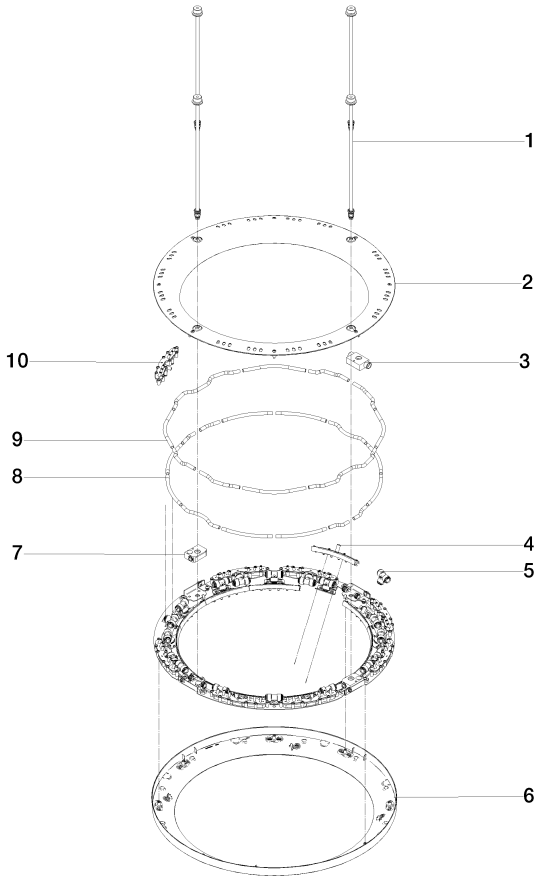


## Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|---|---|---|---|---|
| 2 | 90 12 05 087 00-00 | casing | 1.00 | 10 |
| 1 | 90 28 22 605 01-00 | distributor | 4.00 | 10 |
| 6 | 90 12 05 088 00-00 | casing | 1.00 | 10 |
| 10 | 90 17 09 061 01 90 | jet module TEMPEST | 8.00 | 2 |
| 4 | 90 17 09 060 01 90 | jet module | 12.00 | 2 |
| 9 | 90 30 03 117 00 90 | hose | 1.00 | 30 |
| 8 | 90 30 03 118 00 90 | hose | 1.00 | 2 |
| 7 | 90 24 03 535 00 90 | distributor | 2.00 | 2 |
| 5 | 90 24 04 384 00 90 | adaptor | 20.00 | 2 |
| 3 | 90 24 03 535 01 90 | distributor | 2.00 | 30 |

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com