SERENITY SKY+ Rain panel for recessed ceiling installation with light - Chrome

SERIES-VARIOUS

41 781 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 5 different flow modes
- Rain panel, 600 x 420 mm
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- LAMINAR FLOW, max. flow rate 10 l/min (at 3 bar)
- AQUAPRESSURE FLOW, max. flow rate 9.4 l/min (at 3 bar)
- COOL MIST, max. flow rate 1 l/min (at 3 bar)
- with anti-scale system

Technical data:

- min. recess depth 150 mm
- weight 15kg

Electric:

- Recommended control element: xTool

Ceiling module power supply

- 24V DC (CV)

Ambient lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

technical data:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).

Sanitary:

- recommended water hardness: 6-7 °dH - if the water is harder, integrate a water softener that uses the ion exchange principle into the feed pipe.
- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed. Recommendation: Floor drain (connected rating) = 1l/sec, drainage rate DN 50
- feed pipe (hot/cold): 2x DN 20
- For the optimum choice of hot water storage device - taking into consideration additional drawing-off points and the frequency with which the rain panels are used - the specific demand needs to be assessed

Notes:

- Dornbracht recommends consulting a systems integrator.

includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

Chrome	41 781 979-00
Dark Chrome	41 781 979-19
Brushed Bronze	41 781 979-42
Brushed Champagne (22kt Gold)	41 781 979-46
Champagne (22kt Gold)	41 781 979-47
Brushed Stainless Steel	41 781 979-86
Brushed Dark Platinum	41 781 979-99

SERENITY SKY+ Rain panel for recessed ceiling installation with light - Chrome

SERIES-VARIOUS

41 781 979 Product version from 9/1/2024

Required miscellaneous




SERENITY SKY+ Concealed ceiling installation box with light - 35 781 970 90

●concealed rough parts
●2x female thread 1/2" connections
●flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
●min. recess depth 150 mm
●weight 15kg
●Supply pipe 7 m
●Input 100-240V AC 50-60Hz
●Output 24V DC SELV / Class 2
●ZigBee Light Link RGBW controller
●Provided by customer: Zigbee gateway


SERENITY SKY+ Rain panel for recessed ceiling installation with light - Chrome

SERIES-VARIOUS

41 781 979 Product version from 9/1/2024

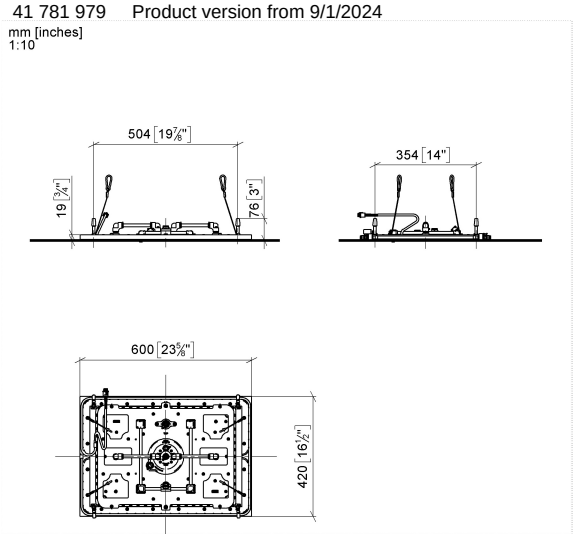

Flow rate chart

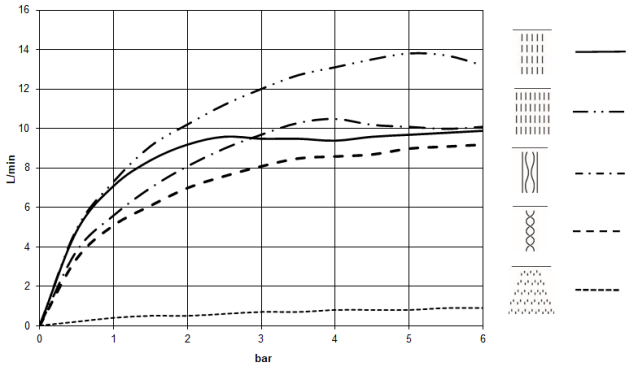

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations

Ü-Zeichen

Certificates and sustainability


LGA_38 WRAS_250102

DORN BRACHT

SERENITY SKY+ Rain panel for recessed ceiling installation with light - Chrome

SERIES-VARIOUS

41 781 979 Product version from 9/1/2024

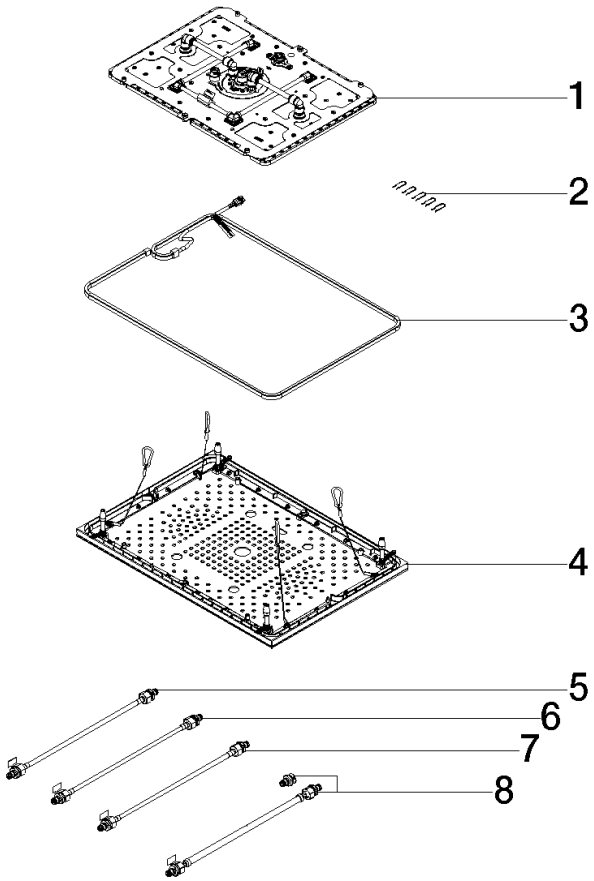

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	90 10 01 263 00 90	electronic accessories	1.00	2
2	91 16 02 053 00 90	holder	1.00	2
1	90 12 01 095 00 90	shower	1.00	2
7	90 30 04 096 03 90	hose	1.00	2
6	90 30 04 096 02 90	hose	1.00	2
8	90 30 04 033 00 90	hose	1.00	2
5	90 30 04 096 01 90	hose	1.00	2
4	90 12 05 106 00-00	cover	1.00	10

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com