# META Washstand fitting with electronic opening and closing function without pop-up waste - Platinum

META

44 515 660



- Infrared sensor technology
- 125mm projection
- height of mixer 140 mm
- height up to aerator 52 mm
- hole diameter 35 mm
- fixed spout
- max. flow 5.7 l/min
- circular, air-enriched flow
- suitable for thermal disinfection
- Automatic shut-off after pre-set time is reached
- Direct temperature control at faucet
- Battery-powered (batteries not included)
- 1x CR-P2 battery required
- lead-free
- 2x screw-in M 8 x 1 pressure hose, leak-tested
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Batteries not included

| | |
|---|---|
| Platinum | 44 515 660-08 |
| Chrome | 44 515 660-00 |
| Brushed Platinum | 44 515 660-06 |
| Dark Chrome | 44 515 660-19 |
| Brushed Durabrass (23kt Gold) | 44 515 660-28 |
| Matte Black | 44 515 660-33 |
| Brushed Champagne (22kt Gold) | 44 515 660-46 |
| Champagne (22kt Gold) | 44 515 660-47 |
| Brushed Chrome | 44 515 660-93 |
| Brushed Dark Platinum | 44 515 660-99 |


DORN BRACHT

# META Washstand fitting with electronic opening and closing function without pop-up waste - Platinum




44 515 660

mm [inches]

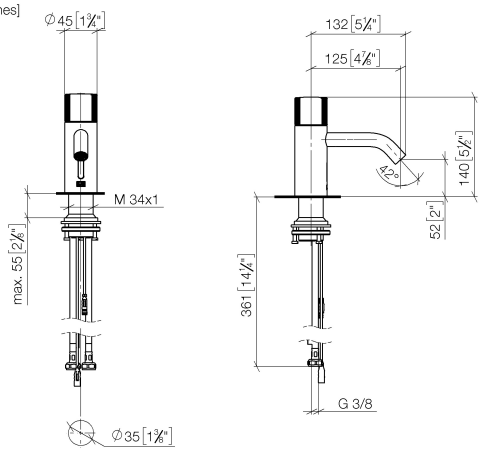


## Flow rate chart

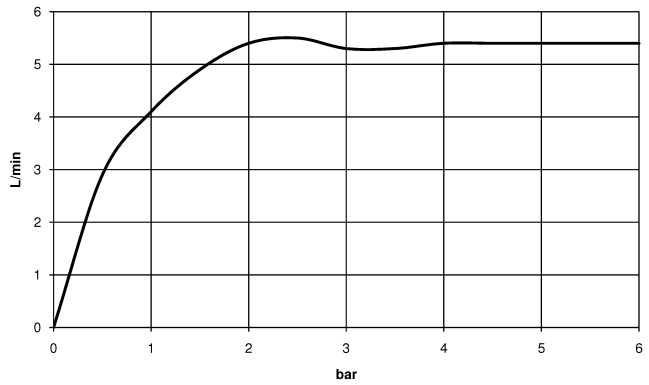


## Certificates


LGA_38243. WRAS_2212021.

# META Washstand fitting with electronic opening and closing function without pop-up waste - Platinum



44 515 660

Parts for other finishes can be found here: Chrome

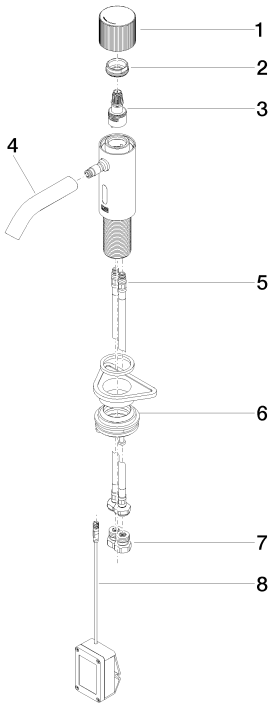


## Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|---|---|---|---|---|
| 1 | 90 20 66 124 00-08 | handle | 1 | 40 |
| 2 | 09 24 04 562 90 | nut | 1 | 60 |
| 3 | 90 90 03 173 00 90 | top | 1 | 2 |
| 4 | 90 11 06 206 00-08 | spout | 1 | 40 |
| 5 | 04 30 04 100 00 90 | hose | 2 | 2 |
| 6 | 04 23 10 044 08 90 | fixing set | 1 | 2 |
| 7 | 90 24 03 314 00 90 | nipple set | 2 | 2 |
| 8 | 90 10 01 250 00 90 | casingwithout battery | 1 | 2 |

We reserve the right to change designs, product range and technical specifications without prior notice.
More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com