Washstand fitting with electronic opening and closing function without pop-up waste - Dark Chrome

TARA

44 521 660



Fits: TARA, META

- 165mm projection
- Infrared sensor technology
- height of mixer 310 mm
- height up to aerator 199 mm
- hole diameter 35 mm
- fixed spout
- max. flow 5.7 l/min
- circular, air-enriched flow
- suitable for thermal disinfection
- Automatic shut-off after pre-set time is reached
- Indirect temperature control (undercounter)
- Control box included
- Adjustable sensor detection range
- Battery or plug-in power supply operated (batteries not included)
- 4x AA (1.5V) batteries required
- lead-free
- 1x screw-in M 8 x 1 pressure hose, leak-tested
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


Batteries not included

Dark Chrome	44 521 660-19
Chrome	44 521 660-00
Brushed Platinum	44 521 660-06
Platinum	44 521 660-08
Brushed Durabrass (23kt Gold)	44 521 660-28
Matte Black	44 521 660-33
Brushed Champagne (22kt Gold)	44 521 660-46
Champagne (22kt Gold)	44 521 660-47
Brushed Chrome	44 521 660-93
Brushed Dark Platinum	44 521 660-99


DORN BRACHT

Washstand fitting with electronic opening and closing function without pop-up waste - Dark Chrome

TARA

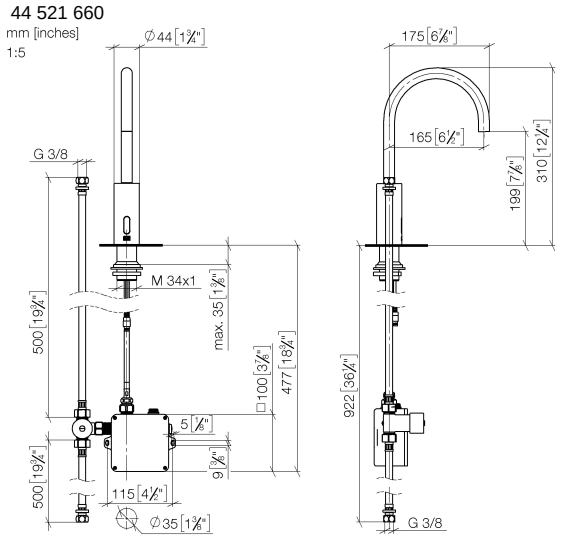

Flow rate chart

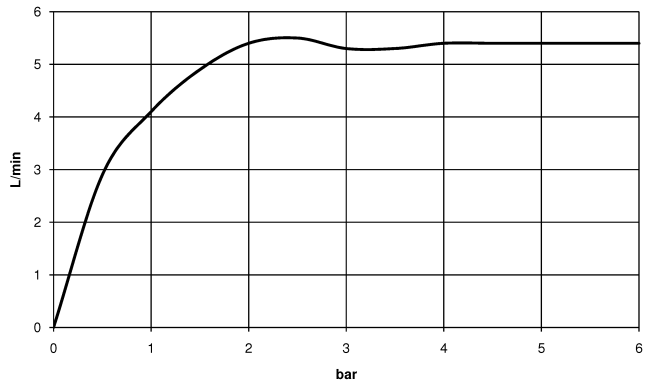

Certificates

Belgaqua_23-210-27_1. LGA_38245. WRAS_2211011. GDV_0400278.

DORN BRACHT

Washstand fitting with electronic opening and closing function without pop-up waste - Dark Chrome

TARA

44 521 660

Parts for other finishes can be found here: Chrome

