KOHLER®

Veil® | K-5401

One-piece elongated smart toilet, dual-flush

Features



- Compact, streamlined one-piece smart toilet with integrated personal cleansing
- Elongated bowl offers added room and comfort
- Tankless design with direct water supply
- Dual flush offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf)
- Front and rear wash modes provide warm water for cleansing
- Self-cleaning function uses UV light and electrolyzed water systems to clean the wand surfaces
- Warm-air drying system with adjustable temperature settings
- Automatic deodorization system
- Heated seat with adjustable temperature settings
- Motion-activated, hands-free opening/closing of cover
- Quiet-Close™ elongated lid and seat prevents slamming
- LED lighting illuminates the bowl to serve as a nightlight
- Integrated bidet functionality featuring a single bidet wand made of stainless steel
- Adjustable spray shape, position, water pressure, water temperature, pulsate, and oscillate functions for the bidet wand
- Touch-screen LCD remote control
- Emergency back-up flush feature for power outages

DISCONTINUED

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 17:31 - US-CA

THE BOLD LOOK OF KOHLER®

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.4.2/CSA B45.16
ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
UL 1951
CSA C22.2 No. 14
CSA C22.2 No. 68
cUL Listed
UL Listed

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Power
Flush Rate:	0.8 or 1.28 gpf (3 or 4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted
Water Surface Size:	7-15/16" x 5-5/8" (202 mm x 143 mm)

Material

- Vitreous china

Recommended Products/Accessories

- [object Object]23726 Drain treatment

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

120 V, 15 A, 60 Hz

Warranty


See website for detailed warranty information.

KOHLER® Intelligent Toilet and C3® Cleansing Seat Three-Year Limited Warranty

DISCONTINUED

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 17:31 - US-CA

THE BOLD LOOK OF KOHLER.

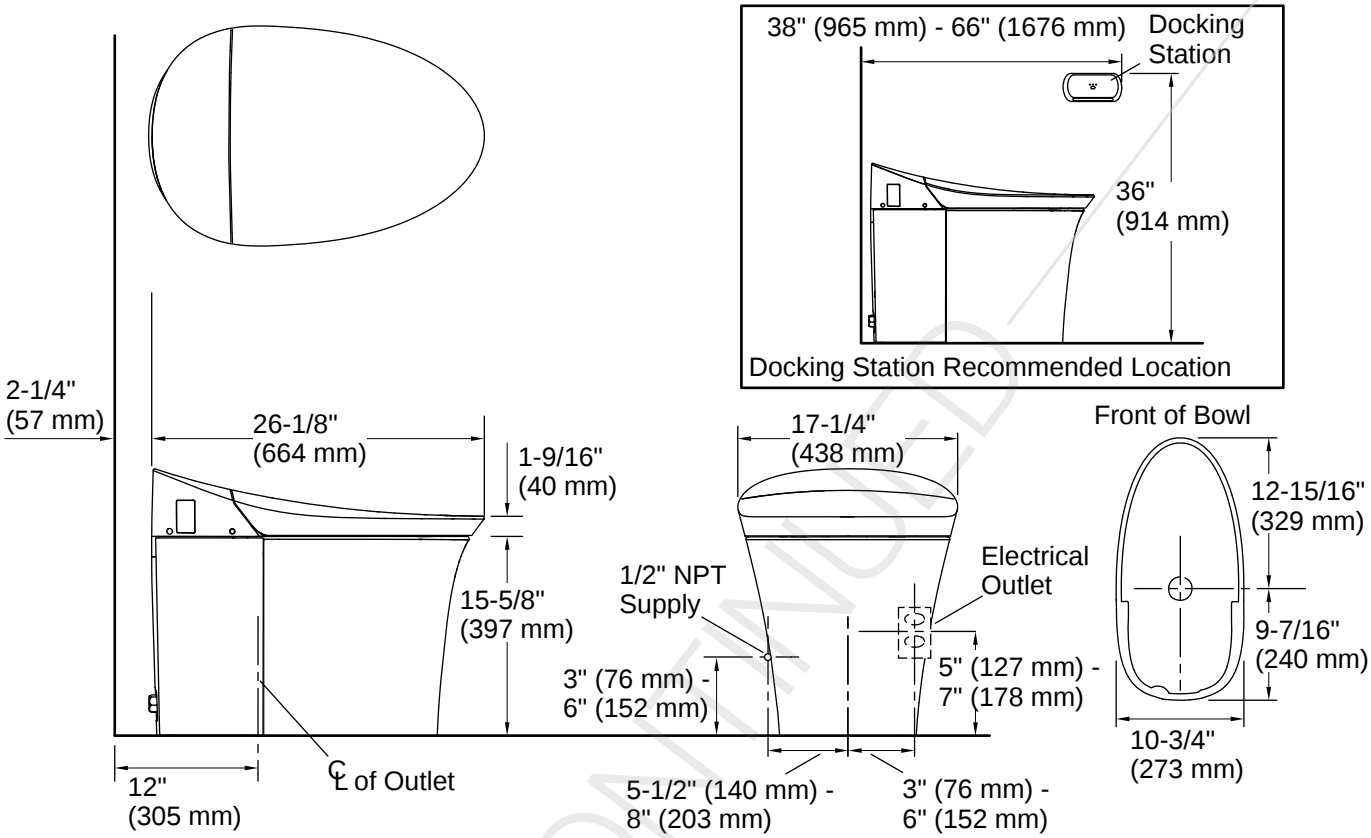

Installation

- Standard 12" (305 mm) rough-in
- For optimum flushing performance, a minimum water supply flow rate of 9.0 gallons per minute or 1.5 gallons in 10 seconds must be confirmed, prior to installation

Installation Notes

Install this product according to the installation instructions.

This product is designed for installation with the electrical and water supplies located through either the wall or the floor.
IMPORTANT! Use the supply hoses provided with the fixture. Do not reuse the previously installed hoses.

DISCONTINUED

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 17:31 - US-CA

THE BOLD LOOK OF KOHLER