Karing® | K-77780

One-piece elongated smart toilet, 1.08 gpf

Features

- Compact, streamlined one-piece smart toilet with integrated personal cleansing
- Elongated bowl offers added room and comfort
- 1.08 gallons per flush (gpf)
- Advanced bidet functionality with self-cleaning wand and precision air dryer
- Adjustable settings for heated seat, dryer and water temperature
- Motion-activated, hands-free opening/closing of cover
- LED lighting illuminates the bowl to serve as a nightlight
- Stainless steel wand offers adjustable spray shape, position, water pressure, temperature, pulsate, and oscillate functions
- Bowl is automatically misted prior to use for more effective rinsing while flushing
- English-language touch-screen LCD remote control
- Self-cleaning function uses UV light and electrolyzed water systems to automatically clean the wand surfaces
- Automatic deodorizer fan reduces odors
- Power Lite® flushing technology offers a powerful, water-efficient 1.08-gallon flush
- Automatic flushing after every use; flush can also be controlled by the touch-screen remote or backup button
- Minimum static pressure of 20 psi required



Sustainability

WATER-SAVING DESIGN

Available Colors/Finishes

Color tiles intended for reference only.

0 White

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 20:21 - US-CA

THE BOLD LOOK OF KOHLER®

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.4.2/CSA B45.16
ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
UL 1951
CSA C22.2 No. 14
CSA C22.2 No. 68
cUL Listed
UL Listed

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Pressure Lite
Flush Rate:	1.08 gpf (4.08 lpf)
Bowl Shape:	Elongated
Seat-Mounting Holes:	5-1/2" (140 mm)
Waste Outlet:	Floor
Trapway Size:	2-7/8" (73 mm)
Trapway Type:	Skirted
Water Surface Size:	12" x 9-1/2" (305 mm x 241 mm)
Rim to Water Surface:	4-7/8" (124 mm)

Recommended Products/Accessories

- [object Object]23726 Drain treatment


Warranty

See website for detailed warranty information.

KOHLER® Intelligent Toilet and C3® Cleansing Seat Three-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 20:21 - US-CA

THE BOLD LOOK OF KOHLER.

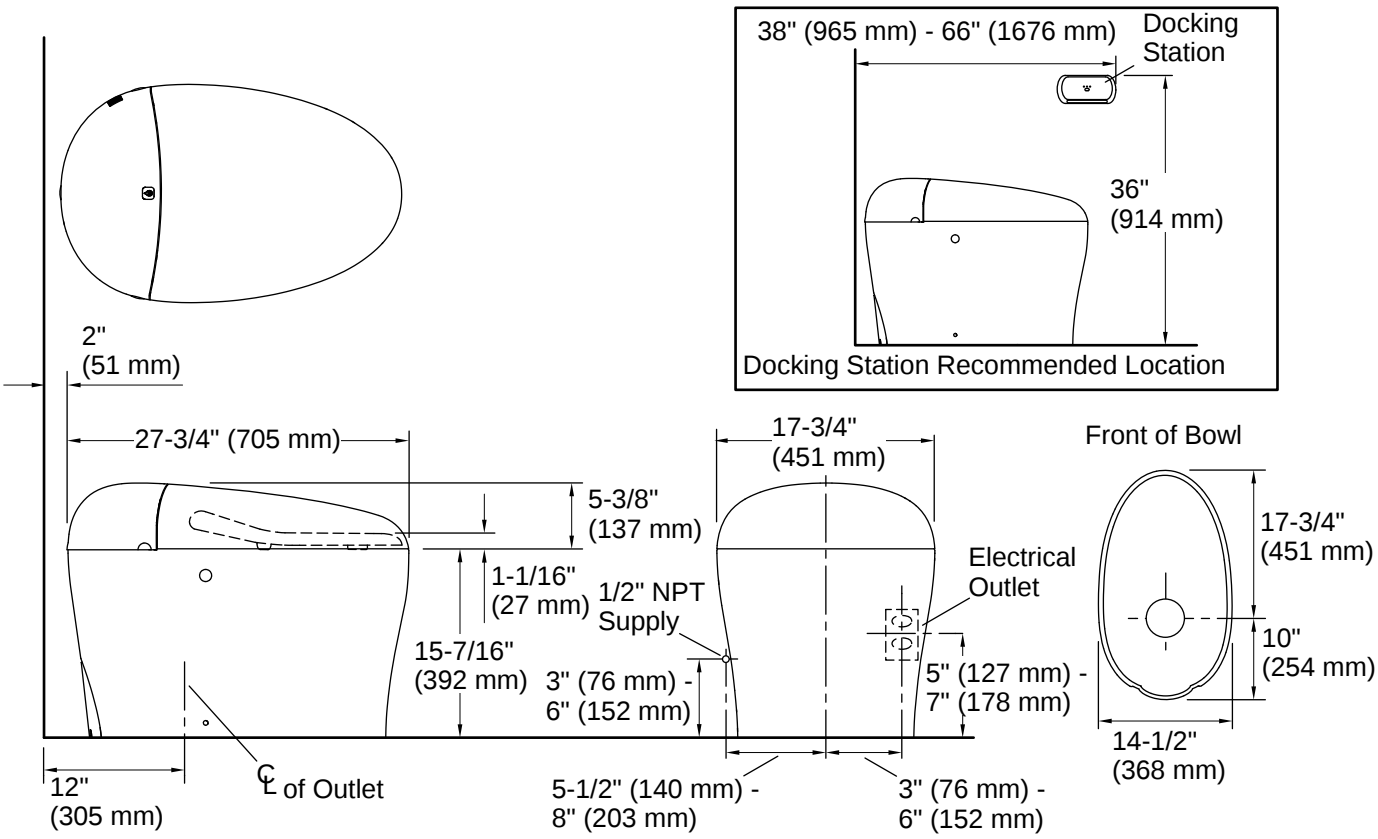

Installation

- Standard 12" (305 mm) rough-in

Installation Notes

Install this product according to the installation instructions.

This product is designed for installation with the electrical and water supplies located through either the wall or the floor.
If the rough-in distance is less than 12" (305mm) the seat may strike the wall when it is opened. Confirm the rough-in is 12" (305 mm) before installing the toilet.
Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 20:21 - US-CA

THE BOLD LOOK OF KOHLER.