LAUFEN

REF: H9201140000001




INEO

# INEOLINK concealed cistern for wall-hung WC

OPTIONS

000 - standard option

SPECIFICATION TEXT

Pre-assembled installation element, suitable for wall-hung WC  in pre-wall and studded wall installations
Foot stanchions adjustable (+200mm) with friction brake
Foot plates rotatable, suiting UA50, UA75 and INEOGRID dry-wall building systems, as well as direct-to floor fixation
Wall fixation adjustable tool-free (135…205mm)
Concealed cistern with top water inlet
Insulated against condensation
Fill valve, noise class 1
Adjustable dual flush valve with two-cable activation technology
Adjustable flow reducer (l/sec) against over-splashing
Multi-purpose connection box behind the WC

IMPORTANT NOTICE:
H920114 LAUFEN INEOLINK for drywall construction. For the installation in metal and
wooden studded walls, or in front of solid walls. Pre-wall installation requires a wall thickness of minimum 80 mm. Maximum load 400kg

MOUNTING ACCESSORIES INCLUDED

Angle/ stop valve ½", brass
Revision and connection box for the flush plate and WC
WC connection set DN90
Drain elbow DN90 and adapter DN110 HDPE
2x M12 bolt with sleeve for WC
Tool free adjustable wall fixation
Set of screws and dowels for wall and floor fixation
Basket for fresh stone

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-H9201140000001?sku=H9201140000001

MOUNTING ACCESSORIES EXCLUDED

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Optional:
Sound absorber pads VS16032C000000 (to fulfil SIA 181 and others)
Spare parts and many more accessories available

Average water consumption (L.) : 3.75

Bullet Point I : Pre-assembled LAUFEN INEOLINK installation element for wall-hung WC. It is improved for a most easy and rapid single-person installation in dry-wall and pre-wall situations

Bullet Point II : With a height adjustability system with friction-braked legs (0...200 mm) and with tool free depth-adjustment (135...205 mm). Foot can be rotated to fit common UW50 and UW75 profiles, as well as the LAUFEN INEOGRID system.

Bullet Point III : It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l. Flushing performance can be adjusted on the fly, without disassembly of the flush valve, to avoid over-splashing. All internal components can be replaced and maintained without the use of tools either

Bullet Point IV : INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

Bullet Point V : H9201140000001 complies with EN 14055

Dynamic pressure range : 0,5 - 10 Bar

Elbow connection : DN90 (110 mm)

Flushing volume preset : Dual flush 3/6 litres

Height Adjustable : 0 – 200 mm

Material : Plastic, Steel powder coated, Steel zinc plated

Maximum Temperature (°C) : 25

Minimum fixation depth (mm) : 135

Net weight (kg) : 12.67

Operating panel position : Frontal

Suitable for : Wall-hung WC

WC Fixation : 180 mm, 230 mm

Wall Fixation Adjustable : 135 – 205 mm

Water inlet position : Top




Adjustable flushing volume

Adjustable flushing volume: Dual flush 3/4,5 litres




Adjustable flushing volume


Adjustable flushing volume: Dual flush 6/3 litres




Adjustable flushing volume

Adjustable flushing volume: Dual flush 4/2 litres

## TECHNICAL DRAWINGS

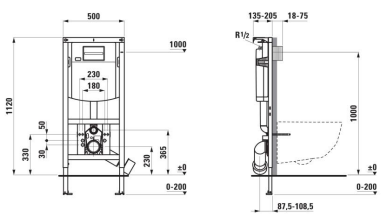


© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-H9201140000001?sku=H9201140000001

## COMPATIBLE WITH



Combipack wall-hung WC H821331, Silent flush/'rimless', washdown, without flushing rim, incl. seat and cover with lowering system

**H866331**...0001



Wall-hung WC Silent flush, washdown, without flushing rim

**H821331**...0001



Wall-hung WC 'rimless', washdown, without flushing rim

**H820337**...0001



Combipack wall-hung WC H820337, washdown, 'rimless' without flushing rim, incl. seat and cover with lowering system

**H866330**...0001



Wall-hung WC 'compact', washdown, rimless

**H820333**...0001



Combipack wall-hung WC H820333 'compact', washdown, rimless, with seat and cover slim with lowering system

**H866333**...0001



Wall-hung WC, Silent flush, washdown, EasyFit 3.0 fixation

**H820860**...0001




Combipack wall-hung WC H820860 Silent flush/'rimless', washdown, incl. seat and cover with lowering system and antinoise set, EasyFit 3.0 fixation

**H866860**...0001




Combipack wall-hung WC H820863 Silent flush/'rimless', washdown, compact, incl. seat and cover with lowering system and antinoise set, EasyFit 3.0 fixation

**H866863**...0001



Wall-hung WC compact, Silent flush, washdown, EasyFit 3.0 fixation

**H820863**...0001



Flush Plate INEO HORIZON, Dual Flush

**H900111**...0001



Flush Plate INEO SUNRISE, Dual Flush

**H900112**...0001

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-H9201140000001?sku=H9201140000001



Flush Plate INEO AIR, Dual Flush

**H900113**...0001



Flush Plate INEO MOON, Dual Flush

**H900114**...0001



Flush Plate INEO MOONDANCE, Dual Flush

**H900116**...0001



Flush Plate INEO GROOVE, Dual Flush

**H900117**...0001




Flush Plate INEO SKYLINE, Dual Flush

**H900118**...0001



Flush Plate INEO CITY, Stainless Steel, Dual Flush

**H900120**...0001

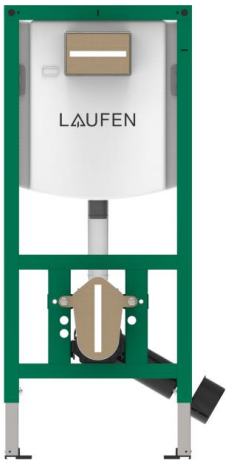


© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-H9201140000001?sku=H9201140000001



## INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-H9201140000001?sku=H9201140000001