

INEO

INEOLINK concealed cistern for wall-hung WC, for accessible installations, rim height +50 mm

KEY FEATURES

• Pre-assembled LAUFEN INEOLINK installation element for wall-hung WC and shower WC. It is improved for a most easy and rapid single-person installation in dry-wall and pre-wall situations

• With a height adjustability system with friction-braked legs (0...200 mm) and with tool free depth-adjustment (135...205 mm). Foot can be rotated to fit common UW50 and UW75 profiles, as well as the LAUFEN INEOGRID system.

• It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l. Flushing performance can be adjusted on the fly, without disassembly of the flush valve, to avoid over-splashing. All internal components can be replaced and maintained without the use of tools either

• INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

• H9201170000001 complies with EN 14055

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

SPECIFICATION TEXT

Pre-assembled installation element, suitable for wall-hung WC and shower WC in pre-wall and studded wall installations
Frame with WC connection 50mm higher than standard
Foot stanchions adjustable (+200mm) with friction brake
Foot plates rotatable, suiting UA50, UA75 and INEOGRID dry-wall building systems, as well as direct-to floor fixation
Wall fixation adjustable tool-free (135...205mm)
Concealed cistern with top water inlet
Insulated against condensation
Fill valve, noise class 1
Adjustable dual flush valve with two-cable activation technology
Adjustable flow reducer (l/sec) against over-splashing
Multi-purpose connection box behind the WC

IMPORTANT NOTICE:
H920117 LAUFEN INEOLINK for drywall construction. For the installation in front of solid walls. Pre-wall installation requires a wall thickness of minimum 80 mm. Maximum load 400kg

MOUNTING ACCESSORIES INCLUDED

Angle/ stop valve ½", brass
Revision and connection box for the flush plate and WC
WC connection set DN90
Drain elbow DN90 and adapter DN110 HDPE
2x M12 bolt with sleeve for WC
Tool free adjustable wall fixation
Set of screws and dowels for wall and floor fixation
Tubing for a shower toilet hose
Basket for fresh stone

MOUNTING ACCESSORIES EXCLUDED

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Optional:
H8926670000001 INEOLINK installation element for grip and restraint systems, left
H8926680000001INEOLINK installation element for grip and restraint systems, right
Sound absorber pads VS16032C000000 (to fulfil SIA 181 and others)
Spare parts and many more accessories available


Average water consumption (L.) : 3.75
Dynamic pressure range : 0,5 - 10 Bar
Elbow connection : DN90 (110 mm)
Flushing volume preset : Dual flush 3/6 litres
Height Adjustable : 0 – 200 mm


Material : Plastic, Steel powder coated, Steel zinc plated
Maximum Temperature (°C) : 25
Minimum fixation depth (mm) : 135
Net weight (kg) : 14.26
Operating panel position : Frontal

Suitable for : Wall-hung WC
WC Fixation : 180 mm, 230 mm
Wall Fixation Adjustable : 135 – 205 mm
Water inlet position : Top

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

TECHNICAL DRAWINGS

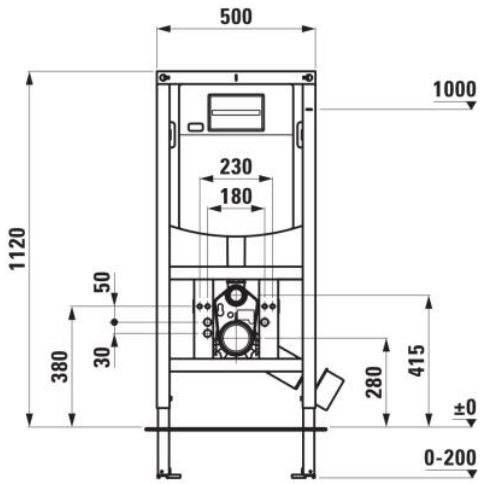

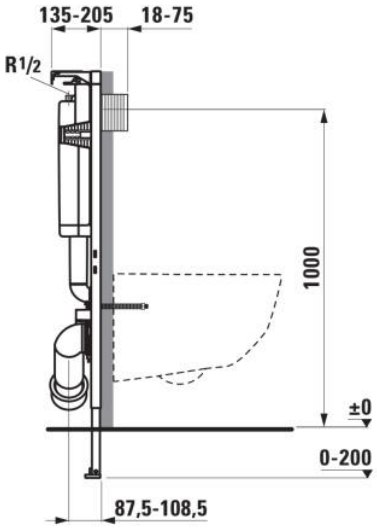



Adjustable flushing volume

Adjustable flushing volume: Dual flush 4/2 litres



Adjustable flushing volume

Adjustable flushing volume: Dual flush 6/3 litres



Adjustable flushing volume

Adjustable flushing volume: Dual flush 3/4,5 litres

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

water_label_text




© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

COMPATIBLE WITH



Wall-hung WC 'liberty', washdown, rimless, barrier-free

H821960...0001

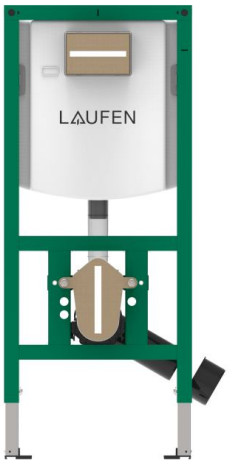

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001



INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001