LAUFEN

REF: H9201190000001



INEO

INEOLINK concealed cistern for wall hung WC, for corner installation

KEY FEATURES

• Pre-assembled LAUFEN INEOLINK installation element for wall-hung WC in corner situations with limited room space. It is improved for a most easy and rapid single-person installation in dry-wall and pre-wall situations

• With a height adjustability system (0...200 mm) and a triangular wall connecting part for perfect positionning in a corner.

• It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l. All internal components can be replaced and maintained without the use of tools either

• INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

• H9201190000001 complies with EN 14055

SPECIFICATION TEXT

Pre-assembled installation element, suitable for wall-hung WC in pre-wall installations
Foot stanchions adjustable (+200mm)
Foot plates welded for direct-to floor fixation
Triangular wall fixation
Concealed cistern with top water inlet
Insulated against condensation
Fill valve, noise class 1
Adjustable dual flush valve with two-cable activation technology
Adjustable flow reducer (l/sec) against over-splashing
Multi-purpose connection box behind the WC

IMPORTANT NOTICE:
H920119 LAUFEN INEOLINK for drywall construction. For the installation in front of solid walls. Pre-wall installation requires a wall thickness of minimum 80 mm. Maximum load 400kg

MOUNTING ACCESSORIES INCLUDED

Angle/ stop valve ½", brass
Revision and connection box for the flush plate and WC
WC connection set DN90
Drain elbow DN90 and adapter DN110 HDPE
2x M12 bolt with sleeve for WC
Set of screws and dowels for wall and floor fixation

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-corner-installation-H9201190000001?sku=H9201190000001

MOUNTING ACCESSORIES EXCLUDED

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Optional:
Sound absorber pads VS16032C000000 (to fulfil SIA 181 and others)
Spare parts and many more accessories available

Average water consumption (L.) : 3.75

Dynamic pressure range : 0,5 - 10 Bar

Elbow connection : DN90 (110 mm)

Flushing volume preset : Dual flush 3/6 litres

Height Adjustable : 0 – 200 mm

Material : Plastic, Steel powder coated, Steel zinc plated

Maximum Temperature (°C) : 25

Minimum fixation depth (mm) : 135

Net weight (kg) : 10.85

Operating panel position : Frontal

Suitable for : Wall-hung WC

WC Fixation : 180 mm, 230 mm

Wall Fixation Adjustable : 135 – 205 mm

Water inlet position : Top



Adjustable flushing volume

Adjustable flushing volume: Dual flush 4/2 litres



Adjustable flushing volume


Adjustable flushing volume: Dual flush 3/4,5 litres





Adjustable flushing volume

Adjustable flushing volume: Dual flush 6/3 litres

TECHNICAL DRAWINGS



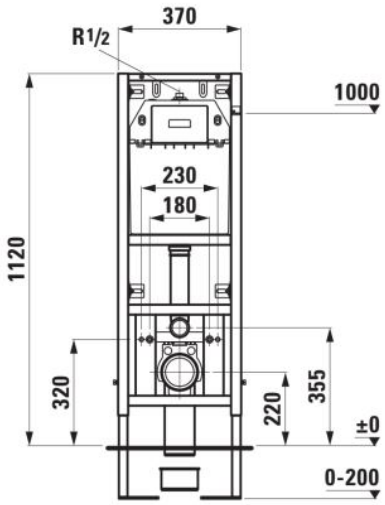


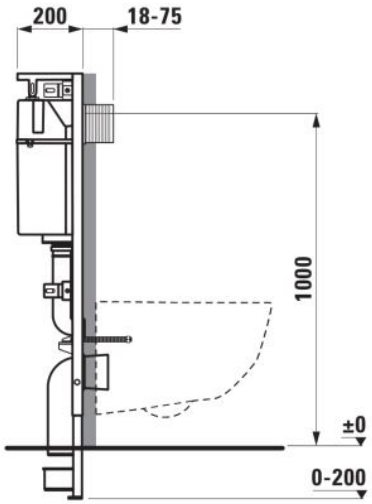

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-corner-installation-H9201190000001?sku=H9201190000001

water_label_text



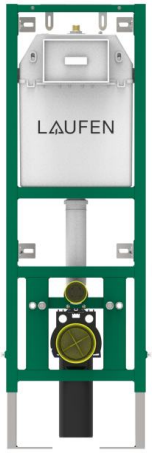

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-corner-installation-H9201190000001?sku=H9201190000001



INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-corner-installation-H9201190000001?sku=H9201190000001