LAUFEN

REF: H9261010000001



INEO

INEOLINK brickwall concealed cistern for floor-standing WC

OPTIONS

000 - standard option

SPECIFICATION TEXT

Pre-assembled cistern, suitable for floor standing WC
Concealed cistern with top water inlet
Insulated against condensation
Fill valve, noise class 1
Adjustable dual flush valve with two-cable activation technology
Adjustable flow reducer (l/sec) against over-splashing

IMPORTANT NOTICE:
H926101 LAUFEN INEOLINK for brick-built and dry-wall construciton. Not self-supportive, does not feature fixation for wall-hung WC.

MOUNTING ACCESSORIES INCLUDED

Angle/ stop valve ½", brass
Revision and connection box for the flush plate
Fastening material
Basket for fresh stone

MOUNTING ACCESSORIES EXCLUDED

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Spare parts and many more accessories available

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-floor-standing-wc-H9261010000001?sku=H9261010000001

Average water consumption (L.) : 3.75

Bullet Point I : Pre-assembled LAUFEN INEOLINK concealed cistern for floorstanding WC.

Bullet Point II : It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l. Flushing performance can be adjusted on the fly, without disassembly of the flush valve, to avoid over-splashing. All internal components can be replaced and maintained without the use of tools either

Bullet Point III : INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

Bullet Point IV : H9261010000001 complies with EN 14055

Dynamic pressure range : 0,5 - 10 Bar

Flushing volume preset : Dual flush 3/6 litres

Material : Plastic

Maximum Temperature (°C) : 25

Net weight (kg) : 2.84

Operating panel position : Frontal

Suitable for : Floor-standing toilet

Tank depth (mm) : 125

Water inlet position : Top



Adjustable flushing volume

Adjustable flushing volume: Dual flush 3/4,5 litres



Adjustable flushing volume


Adjustable flushing volume: Dual flush 6/3 litres



Adjustable flushing volume

Adjustable flushing volume: Dual flush 4/2 litres

TECHNICAL DRAWINGS

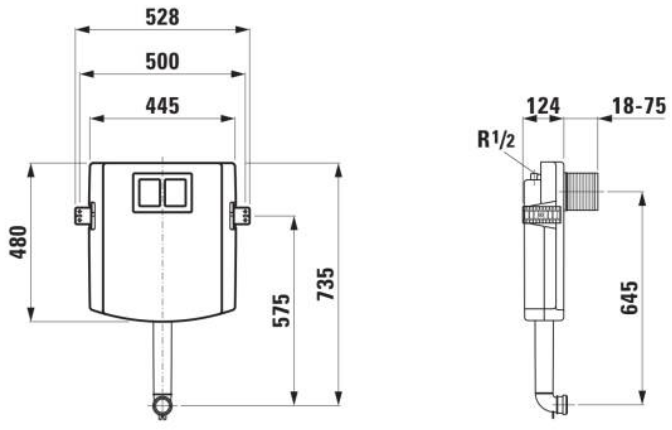

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-floor-standing-wc-H9261010000001?sku=H9261010000001

COMPATIBLE WITH



Flush Plate INEO HORIZON, Dual Flush

H900111...0001



Flush Plate INEO SUNRISE, Dual Flush

H900112...0001



Flush Plate INEO AIR, Dual Flush

H900113...0001



Flush Plate INEO MOON, Dual Flush

H900114...0001



Flush Plate INEO MOONDANCE, Dual Flush

H900116...0001



Flush Plate INEO GROOVE, Dual Flush

H900117...0001



Flush Plate INEO SKYLINE, Dual Flush

H900118...0001



Flush Plate INEO CITY, Stainless Steel, Dual Flush

H900120...0001

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-floor-standing-wc-H9261010000001?sku=H9261010000001



INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-floor-standing-wc-H9261010000001?sku=H9261010000001