LAUFEN

REF: H9261030000001



INEO

INEOLINK brickwall concealed cistern for wall-hung WC and shower WC

KEY FEATURES

- Pre-assembled LAUFEN INEOLINK concealed cistern for wall-hung WC.
- It has a zinc.plated metal frame to be conveniently installed in a brick-built wall. The frame includes the treads for the 2x M12 bolts for the wall-hung WC
- It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l. Flushing performance can be adjusted on the fly, without disassembly of the flush valve, to avoid over-splashing. All internal components can be replaced and maintained without the use of tools either
- INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets
- H9261010000001 complies with EN 14055

SPECIFICATION TEXT

Pre-assembled cistern, suitable for wall-hung WC and shower WC in brick-built wall installations
Concealed cistern with top water inlet
Insulated against condensation
Fill valve, noise class 1
Adjustable dual flush valve with two-cable activation technology
Adjustable flow reducer (l/sec) against over-splashing

IMPORTANT NOTICE:
H926103 LAUFEN INEOLINK for brick-built construction, in front of minimum 80mm strong solid walls.

MOUNTING ACCESSORIES INCLUDED

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-wall-hung-wc-shower-wc-H9261030000001?sku=H9261030000001

Angle/ stop valve ½", brass
Revision and connection box for the flush plate
Drain elbow DN90 and adapter DN110 HDPE
2x M12 bolt with sleeve for WC
Tubing for a shower toilet hose
Fastening material
Basket for fresh stone

MOUNTING ACCESSORIES EXCLUDED

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Spare parts and many more accessories available

Dynamic pressure range : 0,5 - 10 Bar
Elbow connection : DN90 (110 mm)
Flushing volume preset : Dual flush 3/6 litres
Material : Plastic, Steel zinc plated
Maximum Temperature (°C) : 25
Net weight (kg) : 6.98
Operating panel position : Frontal
Suitable for : Wall-hung WC
Tank depth (mm) : 125
Water inlet position : Top



Adjustable flushing volume
Adjustable flushing volume: Dual flush 6/3 litres




Adjustable flushing volume
Adjustable flushing volume: Dual flush 3/4,5 litres



Adjustable flushing volume
Adjustable flushing volume: Dual flush 4/2 litres

TECHNICAL DRAWINGS

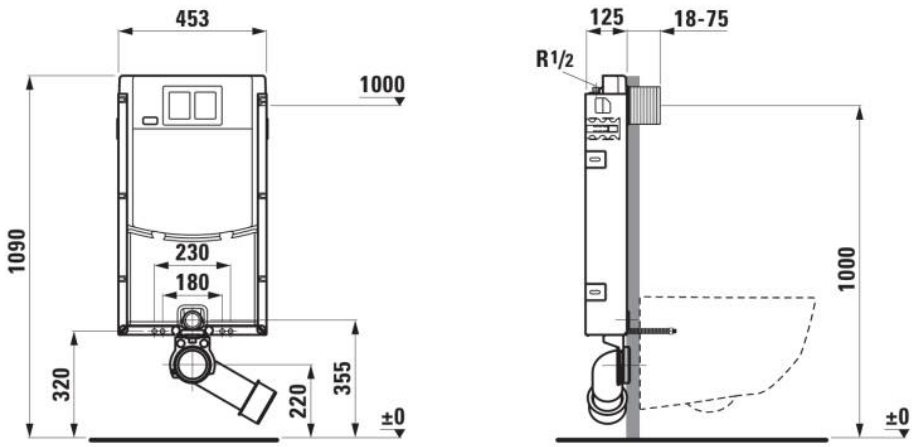

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-wall-hung-wc-shower-wc-H9261030000001?sku=H9261030000001



© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-wall-hung-wc-shower-wc-H9261030000001?sku=H9261030000001



INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-brickwall-concealed-cistern-wall-hung-wc-shower-wc-H9261030000001?sku=H9261030000001