PERRIN & ROWE®
LONDON

HOUSE OF ROHL


SPECIFICATIONS

DESCRIPTION
- 2 fixing points
- Can be used with 5387 and 5307 hand shower and hose

FLOW
- Recommended working pressure 0.5 bar/7.5PSI
- Maximum 5 bar/ 75 PSI
- 8L /min at 0.5 bar
- 16L /min at 3 bar


CERTIFICATIONS
- KIWA - 2107727

WARRANTY
- www.perrinandrowe.co.uk



Traditional Sliding Rail with Shut Off and Lever Handle

MODELS: 5535

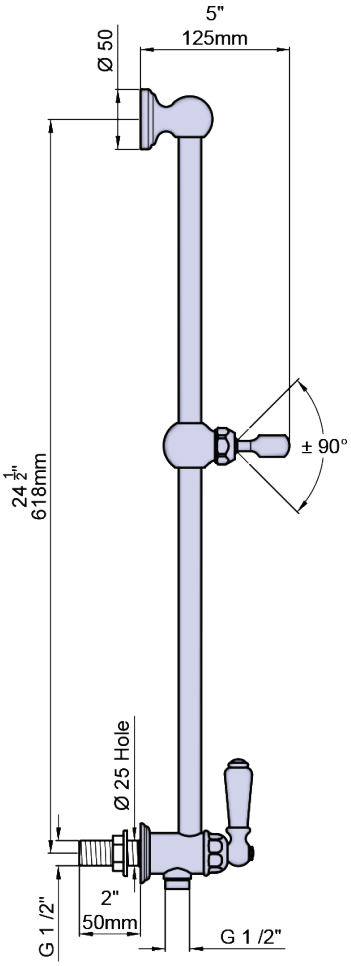

+44 (0) 1708 526 361

www.perrinandrowe.co.uk