

shower channel CeraLine vertical F 600 mm, DN 50

Part number: 521613
GTIN: 4001636521613
Rebate group: 8

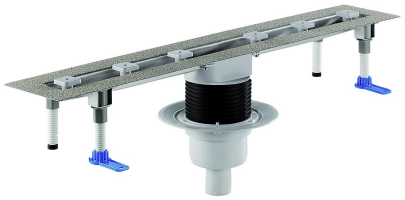

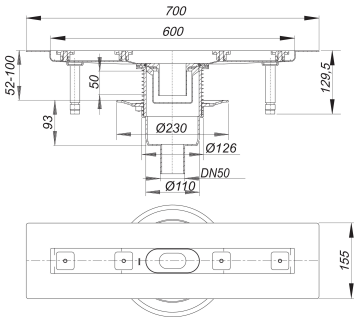

Description:

shower channel CeraLine vertical F 600 mm, DN 50
conforming to DIN EN 1253
Linear drainage, with one drain body 40 S, outlet DN 50 vertical

specification
– sound absorbing height adjustable levelling legs
– integral sand coated flange for secure bonding of under-tile waterproofing
– removable trap insert, 50 mm water seal (conforming to DIN EN 1253)
– height adjustable screws
– temporary blanking plate
– tiling gauges
– edge trim jigs

material
channel 304 stainless steel, trap polypropylene

Options for CeraLine vertical F:

– Any made-to-measure length up to 1200 mm can be supplied.

– From 900 – 1200 mm, two traps can be also be fitted for 1.4 l/sec flow rate

Please enquire!

The outlet connector can be supplied in ABS to suit British Standard sizes and PE-HD conforming to DIN EN 1519. Please enquire.

Fire protection system 2 (Part No. 515025) applicable.

Flow rates tested to DIN EN 1253:

Nominal diameter	Product standard	Min. flow rate according to norm	Water level according to norm	Drainage capacity
DN 50	DIN EN 1253	0.80 l/s	20.00 mm	0.80 l/s

DALLMER

Spare parts:

523983 adjustable pedestals

Dallmer GmbH + Co KG · Wiebelsheidestraße 25 · 59757 Arnsberg · Tel.: +49 2932 9616-0 · Fax: +49 2932 9616-222
www.dallmer.com · info@dallmer.de
Subject to modifications due to technical development, errors and misprints