PERRIN & ROWE®
LONDON

HOUSE OF ROHL


SPECIFICATIONS

DESCRIPTION
- G1/2” inlet

FLOW
- Recommended working pressure 0.5 bar/7.5PSI
- Maximum 5 bar/ 75 PSI
- 10L /min at 0.5 bar
- 20L /min at 3 bar


CERTIFICATION
- KIWA - 2103739

WARRANTY
- www.perrinandrowe.co.uk

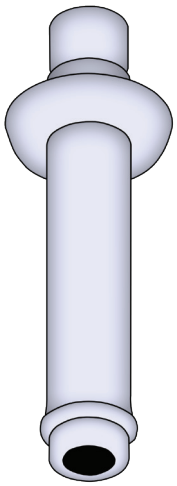

Langbourn G1/2” X G1/2” Ceiling Outlet

MODELS: 5888

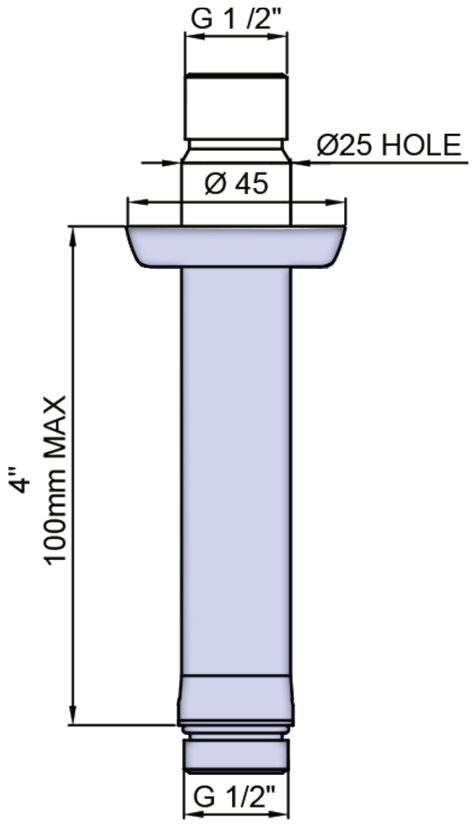

+44 (0) 1708 526 361

www.perrinandrowe.co.uk