LAUFEN

REF: H9201100000001



INEO

INEOLINK slim (90 mm) concealed cistern for wall-hung WC and shower WC

SPECIFICATION TEXT

Pre-assembled installation element, suitable for wall-hung WC in studded wall installations and in pre-wall installations with limited room available
Pre-drilled frame to ease the installation in studded walls
Frame extra high 1190mm
Foot stanchions adjustable (+200mm) with friction brake
Foot plates rotatable, suiting UA50, UA75 and INEOGRID dry-wall building systems, as well as direct-to floor fixation
Wall fixation adjustable (90...140mm)
Concealed cistern with top water inlet
Insulated against condensation
Fill valve, noise class 1
Adjustable dual flush valve with two-cable activation technology
Adjustable flow reducer (l/sec) against over-splashing
Connection funnel and tubing for a shower toilet hose
Multi-purpose connection box behind the WC

IMPORTANT NOTICE:
H920110 LAUFEN INEOLINK for drywall construction. For the installation in metal and wooden studded walls, or in front of solid walls. Pre-wall installation requires a wall thickness of minimum 80 mm. Maximum load 400kg

MOUNTING ACCESSORIES INCLUDED

Angle/ stop valve ½", brass
Revision and connection box for the flush plate
WC connection set DN90
Drain elbow DN90 and adapter DN110 HDPE
2x M12 bolt with sleeve for WC
Adjustable wall fixation
Set of screws for the fixation in studded walls
Tubing for a shower toilet hose

MOUNTING ACCESSORIES EXCLUDED

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-slim-90mm-concealed-cistern-wall-hung-wc-shower-wc-H9201100000001?sku=H9201100000001

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Optional:
Sound absorber pads VS16032C000000 (to fulfil SIA 181 and others)
Spare parts and many more accessories available

Average water consumption (L.) : 3.75

Bullet Point I : Pre-assembled LAUFEN INEOLINK installation element for wall-hung WC. It is improved for a most easy and rapid single-person installation in studded-wall and pre-wall situations with limited depth

Bullet Point II : With a height adjustability system with friction-braked legs (0...200 mm) and with tool free depth-adjustment (90...140 mm). With pre-drilled holes for lateral fixation in studded-walls. Foot can be rotated to fit common UW50 and UW75 profiles, as well as the LAUFEN INEOGRID system.

Bullet Point III : It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l.All internal components can be replaced and maintained without the use of tools

Bullet Point IV : INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

Bullet Point V : H9201100000001 complies with EN 14055

Dynamic pressure range : 0,5 - 10 Bar

Elbow connection : DN90 (110 mm)

Flushing volume preset : Dual flush 3/6 litres

Height Adjustable : 0 – 200 mm

Material : Plastic, Steel powder coated, Steel zinc plated

Maximum Temperature (°C) : 25

Minimum fixation depth (mm) : 93

Net weight (kg) : 14.47

Operating panel position : Frontal

Suitable for : Wall-hung WC

WC Fixation : 180 mm, 230 mm

Wall Fixation Adjustable : 90 – 140 mm

Water inlet position : Top



Adjustable flushing volume

Adjustable flushing volume: Dual flush 3/4,5 litres



Adjustable flushing volume


Adjustable flushing volume: Dual flush 4/2 litres



Adjustable flushing volume

Adjustable flushing volume: Dual flush 6/3 litres

TECHNICAL DRAWINGS

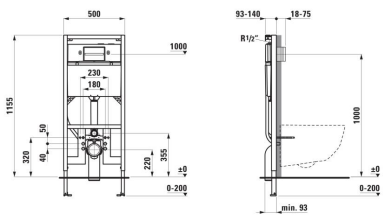

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-slim-90mm-concealed-cistern-wall-hung-wc-shower-wc-H9201100000001?sku=H9201100000001

COMPATIBLE WITH



Wall-hung WC 'rimless', washdown, without flushing rim

H820337...0001



Flush Plate INEO HORIZON, Dual Flush

H900111...0001



Flush Plate INEO SUNRISE, Dual Flush

H900112...0001



Flush Plate INEO AIR, Dual Flush

H900113...0001



Flush Plate INEO MOON, Dual Flush

H900114...0001



Flush Plate INEO MOONDANCE, Dual Flush

H900116...0001



Flush Plate INEO GROOVE, Dual Flush

H900117...0001



Flush Plate INEO SKYLINE, Dual Flush

H900118...0001



Flush Plate INEO CITY, Stainless Steel, Dual Flush

H900120...0001

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-slim-90mm-concealed-cistern-wall-hung-wc-shower-wc-H9201100000001?sku=H9201100000001



© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-slim-90mm-concealed-cistern-wall-hung-wc-shower-wc-H9201100000001?sku=H9201100000001

INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.



© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-slim-90mm-concealed-cistern-wall-hung-wc-shower-wc-H9201100000001?sku=H9201100000001