LAUFEN

REF: H9401010000001



INEO

INEOLINK concealed frame for urinals with external flush, cartridge technology

KEY FEATURES

• Pre-assembled LAUFEN INEOLINK installation element for wall-hung bidets. It is improved for a most easy and rapid single-person installation in dry-wall and pre-wall situations

• With a height adjustability system with friction-braked legs (0...200 mm) and with tool free depth-adjustment (135...205 mm). Foot can be rotated to fit common UW50 and UW75 profiles, as well as the LAUFEN INEOGRID system.

• INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

SPECIFICATION TEXT

Pre-assembled installation element, suitable for wall-hung urinal in pre-wall and studded wall installations
Foot stanchions adjustable (+200mm) with friction brake
Foot plates rotatable, suiting UA50, UA75 and INEOGRID dry-wall building systems, as well as direct-to floor fixation
Wall fixation adjustable tool-free (135...205mm)

IMPORTANT NOTICE:
H910102 LAUFEN INEOLINK for drywall construction. For the installation in metal and wooden studded walls, or in front of solid walls. Pre-wall installation requires a wall thickness of 80 mm. Maximum load 100kg

MOUNTING ACCESSORIES INCLUDED

All accessories included

MOUNTING ACCESSORIES EXCLUDED

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-frame-urinals-external-flush-cartridge-technology-H9401010000001?sku=H9401010000001

LAUFEN INEO Flush Plate for urinal
Sound absorber pads VS16032C000000 (to fulfil SIA 181 and others)
90mm...140 wall fixations are available VS05433C000000
Spare parts and many more accessories available

Height Adjustable : 0 – 200 mm

Material : Plastic, Steel powder coated, Steel zinc plated

Maximum Temperature (°C) : 25


Net weight (kg) : 9.55


Operating panel position : Frontal

Suitable for : Urinal

Wall Fixation Adjustable : 135 – 205 mm

TECHNICAL DRAWINGS

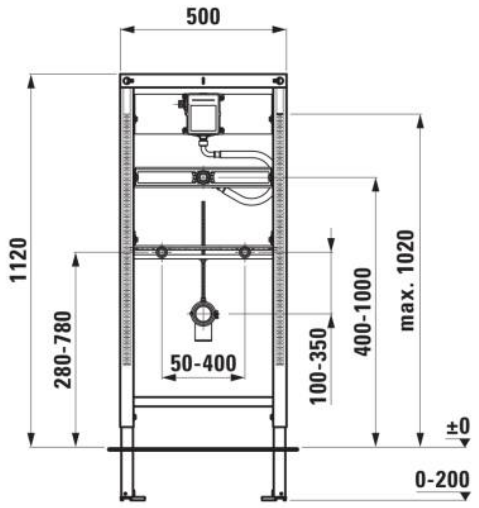

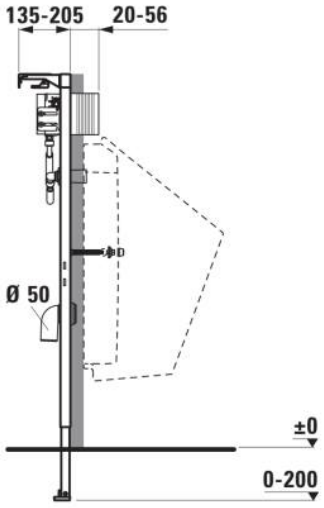

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-frame-urinals-external-flush-cartridge-technology-H9401010000001?sku=H9401010000001

COMPATIBLE WITH



Siphonic urinal, internal water inlet, version without cover

H840975...0001



Siphonic urinal 'rimless'

H841193...4011



Siphonic urinal 'rimless', internal water inlet, without mounting holes for cover

H840285...0001



Siphonic urinal, internal water inlet, version without cover

H841142...0001



Flush Plate Urinal INEO AU101

H909101...0001



Flush plate Urinal INEO AU102

H909102...0001




Flush Plate Urinal INEO AU103

H909103...0001



Siphonic urinal 'rimless', internal water inlet

H841061...0001

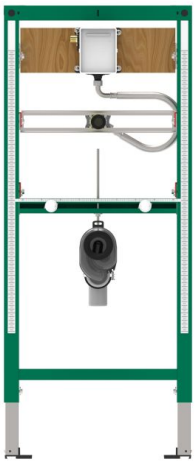

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-frame-urinals-external-flush-cartridge-technology-H9401010000001?sku=H9401010000001



INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.laufen.com/products/ineolink-concealed-frame-urinals-external-flush-cartridge-technology-H9401010000001?sku=H9401010000001